

Problem 1) Using only properties & pairs of the Fourier Transform, show that:

$$F \left\{ \left( \frac{1}{4} \right)^{|n|} \right\} = \frac{\frac{15}{16}}{\frac{17}{16} - \frac{1}{2} \cos(\omega)}$$

↳ Express  $(1/4)^{|n|}$  in a way where pairs appear:

$$\left( \frac{1}{4} \right)^{|n|} = \begin{cases} (1/4)^n, & n > 0 \\ (1/4)^{-n}, & n < 0 \\ 1, & n = 0 \end{cases} = \begin{cases} (1/4)^n u[n-1] \\ (1/4)^{-n} u[-n+1] \\ \delta[n] \end{cases}$$

↳ Or we can include  $n=0$  in the first two cases and then subtract the final case:

$$\left( \frac{1}{4} \right)^{|n|} = \left( \frac{1}{4} \right)^n u[n] + \left( \frac{1}{4} \right)^{-n} u[n] - \delta[n], \text{ and form pairs:}$$

$$F \left\{ \left( \frac{1}{4} \right)^{|n|} \right\} = \frac{1}{1 - \frac{1}{4} e^{-j\omega}} + \frac{1}{1 - \frac{1}{4} e^{j\omega}} - 1 =$$

$$= \frac{1 - \frac{1}{4} e^{j\omega} + 1 - \frac{1}{4} e^{-j\omega}}{\left( 1 - \frac{1}{4} e^{-j\omega} \right) \left( 1 - \frac{1}{4} e^{j\omega} \right)} - 1 =$$

$$= \frac{2 - \frac{1}{2} \cos(\omega)}{\left|1 - \frac{1}{4} e^{-j\omega}\right|^2} - 1 =$$

$$\left\{ \begin{aligned} \cos(x) &= \frac{e^{jx} + e^{-jx}}{2} \\ z \cdot \bar{z} &= |z|^2, \\ z &\in \mathbb{C} \end{aligned} \right.$$

$$|z|^2 = \operatorname{Re}\{z\}^2 + \operatorname{Im}\{z\}^2,$$

Reminders

$$e^{jx} = \cos(x) + j \sin(x) \Leftrightarrow e^{-jx} = \cos(x) - j \sin(x)$$

$$\operatorname{Re}\{e^{jx}\} = \operatorname{Re}\{e^{-jx}\} = \cos(x)$$

$$\operatorname{Im}\{e^{jx}\} = -\operatorname{Im}\{e^{-jx}\} = \sin(x), \text{ so given these:}$$

$$= \frac{2 - \frac{1}{2} \cos(\omega)}{\left(1 - \frac{1}{4} \cos(\omega)\right)^2 + \left(\frac{1}{4} \sin(\omega)\right)^2} - 1 =$$

$$= \frac{2 - \frac{1}{2} \cos(\omega)}{1 - \frac{1}{2} \cos(\omega) + \frac{1}{16} \cos^2(\omega) + \frac{1}{16} \sin^2(\omega)} - 1 =$$

$$= \frac{2 - \frac{1}{2} \cos(\omega)}{1 - \frac{1}{2} \cos(\omega) + \frac{1}{16} (\cos^2(\omega) + \sin^2(\omega))} - 1 =$$

$$\left. \begin{aligned} \cos^2(x) + \sin^2(x) \\ = 1 \end{aligned} \right\}$$

$$= \frac{2 - \frac{1}{2} \cos(\omega)}{1 + \frac{1}{16} - \frac{1}{2} \cos(\omega)} - 1 =$$

$$= \frac{2 - \frac{1}{2} \cos(\omega)}{\frac{17}{16} - \frac{1}{2} \cos(\omega)} - \frac{\frac{17}{16} - \frac{1}{2} \cos(\omega)}{\frac{17}{16} - \frac{1}{2} \cos(\omega)} =$$

$$= \frac{2 - \frac{17}{16}}{\frac{17}{16} - \frac{1}{2} \cos(\omega)} = \frac{15}{16} \quad \square.$$

Problem 2) LTI system with input  $x[n] = -3^n \cdot u[n-1]$ ,  
and impulse response  $h[n] = \left(\frac{1}{2}\right)^n u[n]$ . Find the system's  
output  $y[n]$ , by only using Fourier properties and pairs:

$$\left. \begin{aligned} \mathcal{F}\left\{-3^n u[n-1]\right\} &= \frac{1}{1-3e^{j\omega}} \\ \mathcal{F}\left\{\left(\frac{1}{2}\right)^n u[n]\right\} &= \frac{1}{1-\frac{1}{2}e^{j\omega}} \end{aligned} \right\} \text{using pairs that are known}$$

Hence, knowing  $Y(e^{j\omega}) = X(e^{j\omega}) \cdot H(e^{j\omega}) =$

$$= \frac{1}{1-3e^{j\omega}} - \frac{1}{1-\frac{1}{2}e^{-j\omega}} = \frac{A}{1-3e^{-j\omega}} + \frac{B}{1-\frac{1}{2}e^{-j\omega}}$$

Partial  
Fraction  
Decomposition

$$\Leftrightarrow 1 = A\left(1 - \frac{1}{2}e^{-j\omega}\right) + B(1 - 3e^{-j\omega})$$

$$e^{-j\omega} = 2 : 1 = A \cdot 0 + B(1 - 3 \cdot 2) \Leftrightarrow \underline{B = -1/5}$$

$$e^{-j\omega} = 1/3 : 1 = A(1 - 1/6) + B \cdot 0 \Leftrightarrow \underline{A = 6/5}$$

$$= \frac{6/5}{1-3e^{j\omega}} - \frac{1/5}{1-\frac{1}{2}e^{-j\omega}} = Y(e^{j\omega})$$

using known pairs  
 $\mathcal{F}^{-1}$

$$Y[n] = -\frac{6}{5} 3^n u[-n-1] - \frac{1}{5} \left(\frac{1}{2}\right)^n u[n]$$

Assum 3) Input to LTI system is given:

$$x[n] = 4 \cos\left(\frac{\pi n}{6} + \frac{\pi}{8}\right) - \sin\left(\frac{\pi n}{4} - \frac{\pi}{2}\right)$$

(a) Find the output of the system  $y[n]$ , if its impulse response is:  $h[n] = \frac{\sin\left(\frac{(n-2)\pi}{2}\right)}{(n-2)\pi}$

We know:  $\mathcal{F}\left\{\frac{\sin\left(\frac{\pi n}{2}\right)}{\pi n}\right\} = \begin{cases} 1, & |\omega| \leq \pi/2 \\ 0, & \text{elsewhere} \end{cases}$ , so:

$$\mathcal{F}\left\{\frac{\sin\left(\frac{(n-2)\pi}{2}\right)}{(n-2)\pi}\right\} = \begin{cases} e^{-j2\omega}, & |\omega| \leq \pi/2 \\ 0, & \text{elsewhere} \end{cases}$$

From the time displacement property. We observe that

•  $H(e^{j\omega})$  is a low-pass filter that cuts off frequencies not in  $[-\pi/2, \pi/2]$ , so both of our sinusoids are unaffected by this filter.

• We know the output form in case of sinusoid inputs for LTI systems (see previous tutorial for the formula), so we can compute the answer like so:

$$y[n] = |H(e^{j\pi/6})| 4 \cos\left(\frac{\pi n}{6} + \frac{\pi}{8} + \angle H(e^{j\pi/6})\right) -$$

$$|H(e^{j\pi/4})| \sin\left(\frac{\pi n}{4} - \frac{\pi}{2} + \angle H(e^{j\pi/4})\right)$$

$$|H(e^{j\omega})| = \begin{cases} |e^{-j2\omega}|, & |\omega| \leq \pi/2 \\ |0|, & \text{elsewhere} \end{cases} = \begin{cases} 1, & |\omega| \leq \pi/2 \\ 0, & \text{elsewhere} \end{cases}$$

$$\angle H(e^{j\omega}) = \begin{cases} \angle e^{-j2\omega}, & |\omega| \leq \pi/2 \\ \text{undefined}, & \text{elsewhere} \end{cases} = -2\omega, \quad |\omega| \leq \pi/2$$

$$= 1 \cdot 4 \cdot \cos\left(\frac{\pi n}{6} + \frac{\pi}{8} - 2 \cdot \frac{\pi}{6}\right) - 1 \cdot \sin\left(\frac{\pi n}{4} - \frac{\pi}{2} - 2 \cdot \frac{\pi}{4}\right)$$

$$= 4 \cos\left(\frac{\pi n}{6} + \frac{\pi}{8} - \frac{\pi}{3}\right) - \sin\left(\frac{\pi n}{4} - \frac{\pi}{2} - \frac{\pi}{2}\right)$$

$$= 4 \cos\left(\frac{\pi n}{6} - \frac{5\pi}{24}\right) + \sin\left(\frac{\pi n}{4}\right)$$

$$\begin{cases} \sin(x - \pi) \\ = -\sin(x) \end{cases}$$

(b') Compute the sum:  $\sum_{n=-\infty}^{+\infty} \left| \frac{\sin(0.25\pi n)}{3\pi n} \right|^2$ . 1/4 = 0.25

↳ From Parseval's theorem:

$$\sum_{n=-\infty}^{+\infty} |x[n]|^2 = \frac{1}{2\pi} \int_{-\pi}^{\pi} |X(e^{j\omega})|^2 d\omega$$

↳ In our case:

$$x[n] = \frac{1}{3} \frac{\sin\left(\frac{\pi n}{4}\right)}{\pi n} \xrightarrow{F} X(e^{j\omega}) = \begin{cases} 1/3, & |\omega| \leq \pi/4 \\ 0, & \text{elsewhere} \end{cases}$$

↳ Hence:

$$\sum_{n=-\infty}^{+\infty} \left| \frac{\sin(0.25\pi n)}{3\pi n} \right|^2 = \frac{1}{2\pi} \int_{-\pi/4}^{\pi/4} (1/3)^2 d\omega =$$


$$= \frac{1}{2\pi} \cdot \frac{1}{9} [\omega]_{-\pi/4}^{\pi/4} =$$

$$= \frac{1}{18\pi} \left( \frac{\pi}{4} - \left(-\frac{\pi}{4}\right) \right) =$$

$$= \frac{1}{18\pi} \cdot \frac{\pi}{2} = 1/36.$$

Assum 4) A phase shifter by  $90^\circ$  can be expressed as an LTI system with the following frequency response:

$$H(e^{j\omega}) = \begin{cases} -j, & 0 < \omega < \pi \\ j, & -\pi < \omega < 0 \end{cases}$$

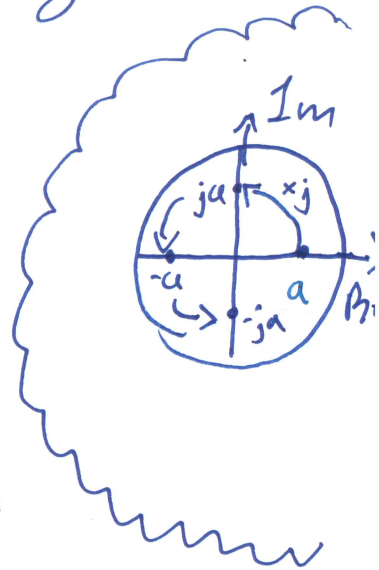

(a) Show that  $\mathcal{F}^{-1}\{H(e^{j\omega})\} = \begin{cases} \frac{2}{n\pi}, & n \text{ odd} \\ 0, & n \text{ even} \end{cases}$

↳ Definition of inverse discrete Fourier transform:

$$\begin{aligned} h[n] &= \frac{1}{2\pi} \int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega n} d\omega = \\ &= \frac{1}{2\pi} \int_{-\pi}^0 j \cdot e^{j\omega n} d\omega - \frac{1}{2\pi} \int_0^{\pi} j \cdot e^{j\omega n} d\omega = \\ &= \frac{j}{2\pi} \left( \left[ \frac{e^{j\omega n}}{jn} \right]_{-\pi}^0 - \left[ \frac{e^{j\omega n}}{jn} \right]_0^{\pi} \right) = \\ &= \frac{j}{2\pi} \left( \frac{1}{jn} - \frac{e^{-jn\pi}}{jn} - \left( \frac{e^{jn\pi}}{jn} - \frac{1}{jn} \right) \right) \end{aligned}$$



$$= \frac{1}{2\pi n} \left( 1 - e^{-jn\pi} - e^{jn\pi} + 1 \right) = \dots (i)$$

$$\left. \begin{array}{l} e^{\pm j\pi} = -1 \end{array} \right\}$$

$$= \frac{1}{2\pi n} \left( 2 - 2(-1)^n \right) =$$

$$= \frac{1}{\pi n} \left( 1 - (-1)^n \right) = \begin{cases} \frac{2}{n\pi}, & n \text{ odd} \\ 0, & n \text{ even} \end{cases} \quad \square.$$

(b') Show that  $h[n]$  can be expressed as:

$$h[n] = \begin{cases} \frac{2}{\pi} \sin^2(\pi n/2), & n \neq 0 \\ 0, & n = 0. \end{cases}$$

From (i), and  $e^{jn\pi} + e^{-jn\pi} = 2\cos(\pi n)$ :

$$h[n] = \frac{1}{2\pi n} \left( 2 - 2\cos(\pi n) \right) =$$

$$= \frac{1}{\pi n} \left( 1 - \cos(\pi n) \right) =$$

$\sin^2(x) = \frac{1 - \cos(2x)}{2}$ , power-reduction trigonometric formula

$$= \begin{cases} \frac{2}{\pi} \sin^2(\pi n/2), & n \neq 0 \\ 0, & n = 0 \end{cases}$$

□.

we can also see from the definition of the inverse Fourier transform that  $h[0] = 0$  in our case.

END