


CS-435
spring semester 2020

Network Technology & Programming Laboratory

University of Crete
Computer Science Department

Stefanos Papadakis

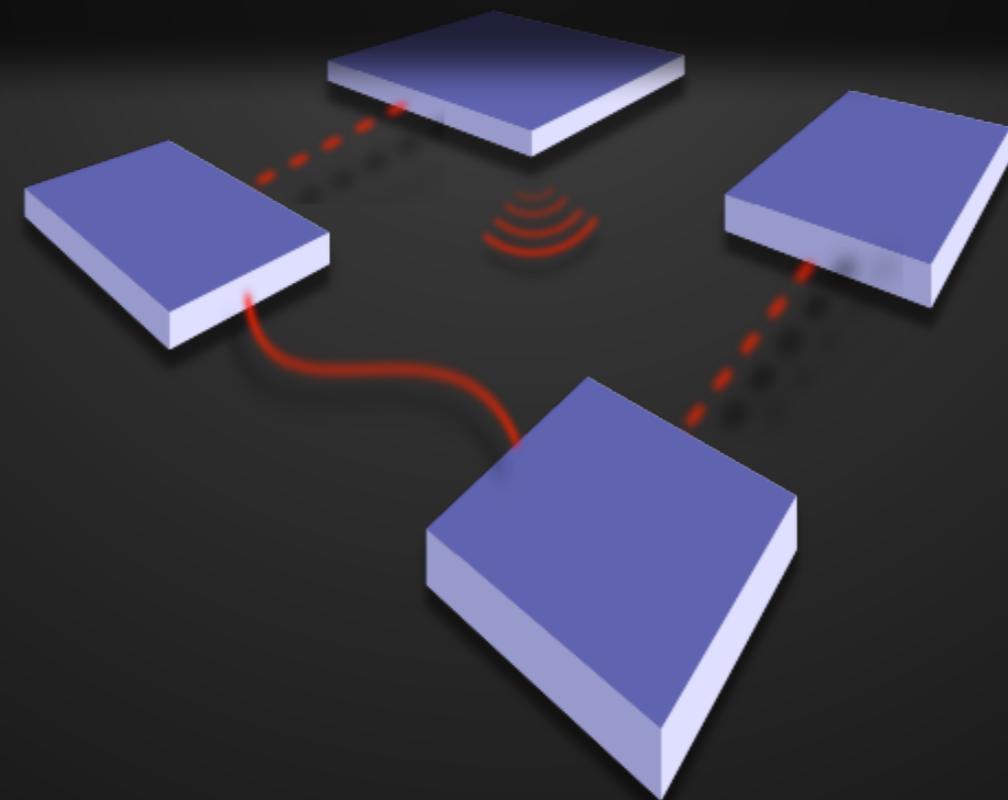


CS-435

Lecture #14 preview:


- IoT
- PAN

Internet of Things


Total number of active device connections worldwide

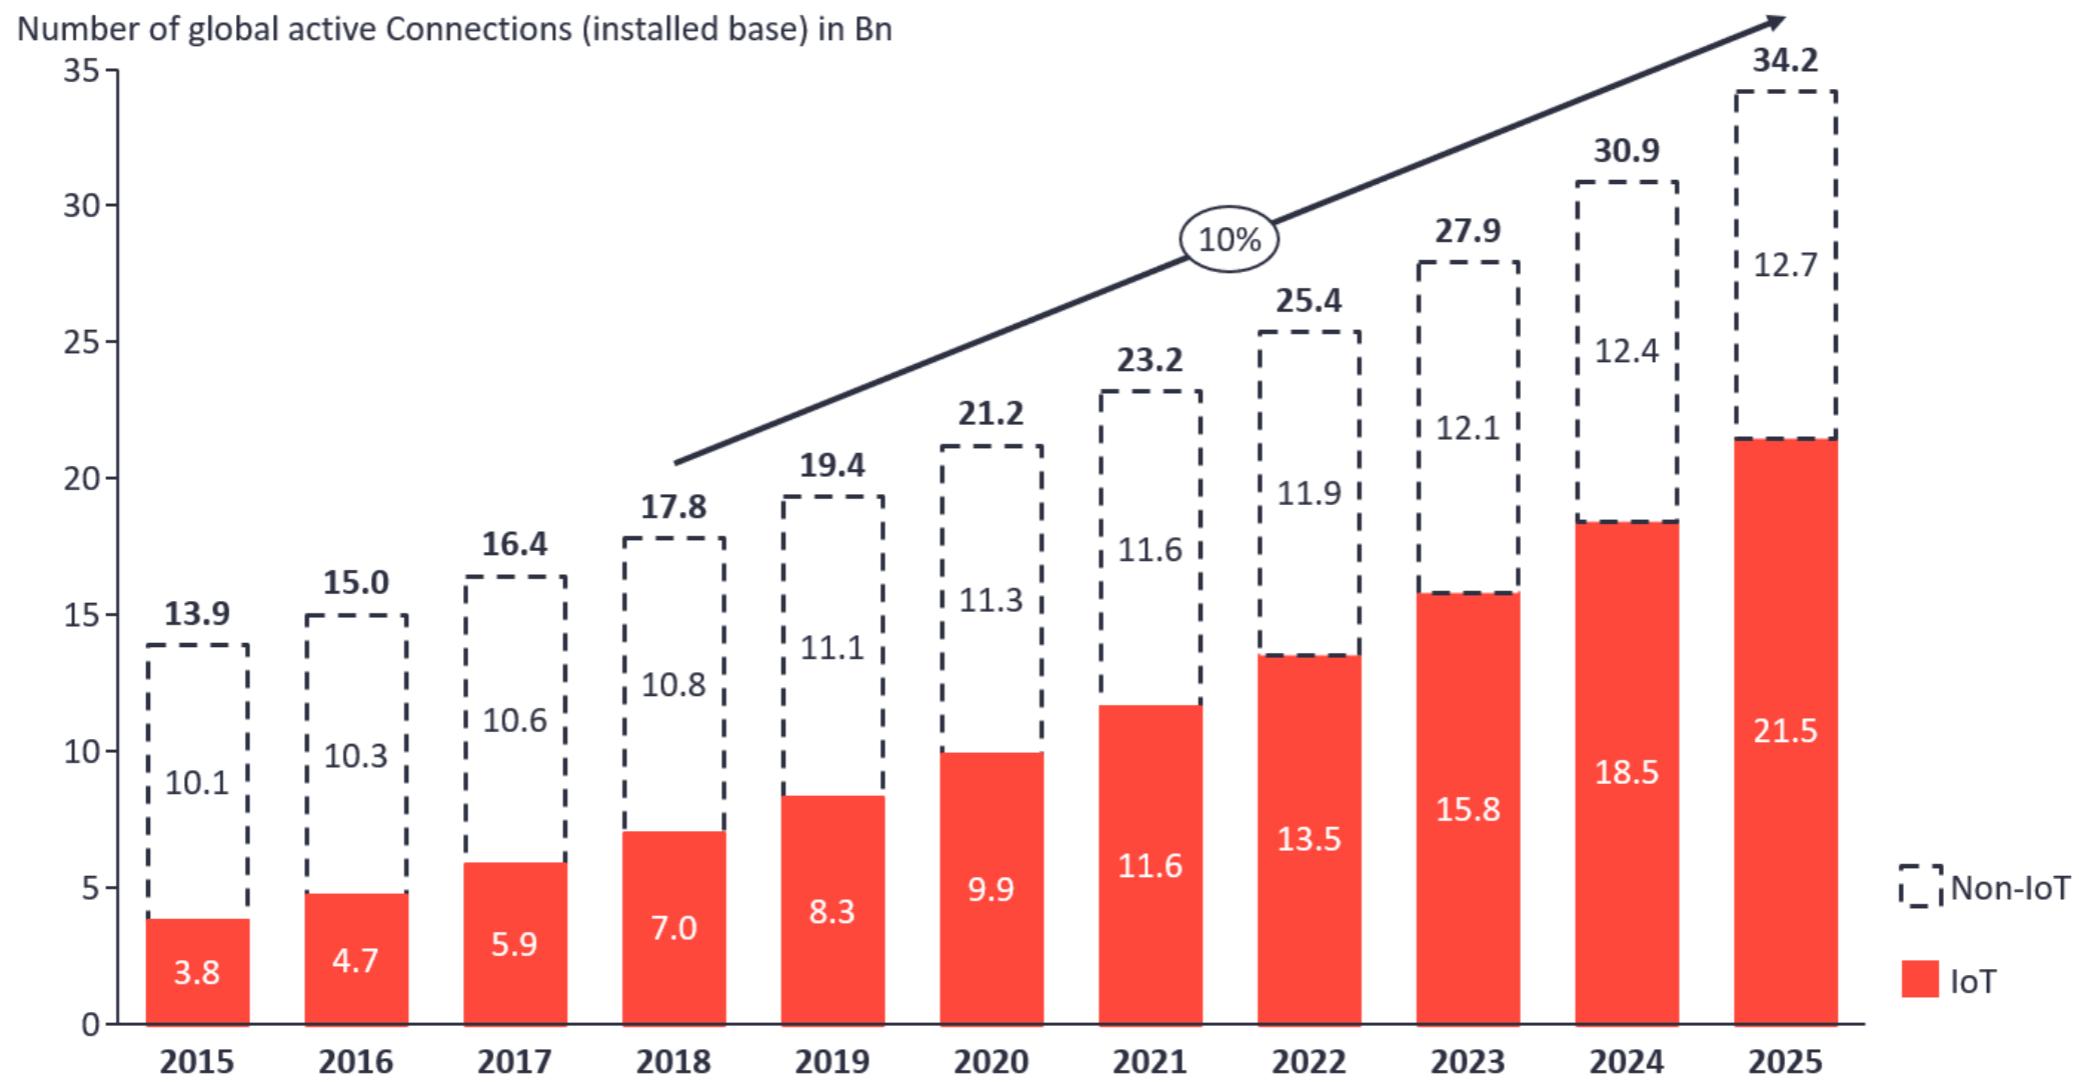

Internet of Things

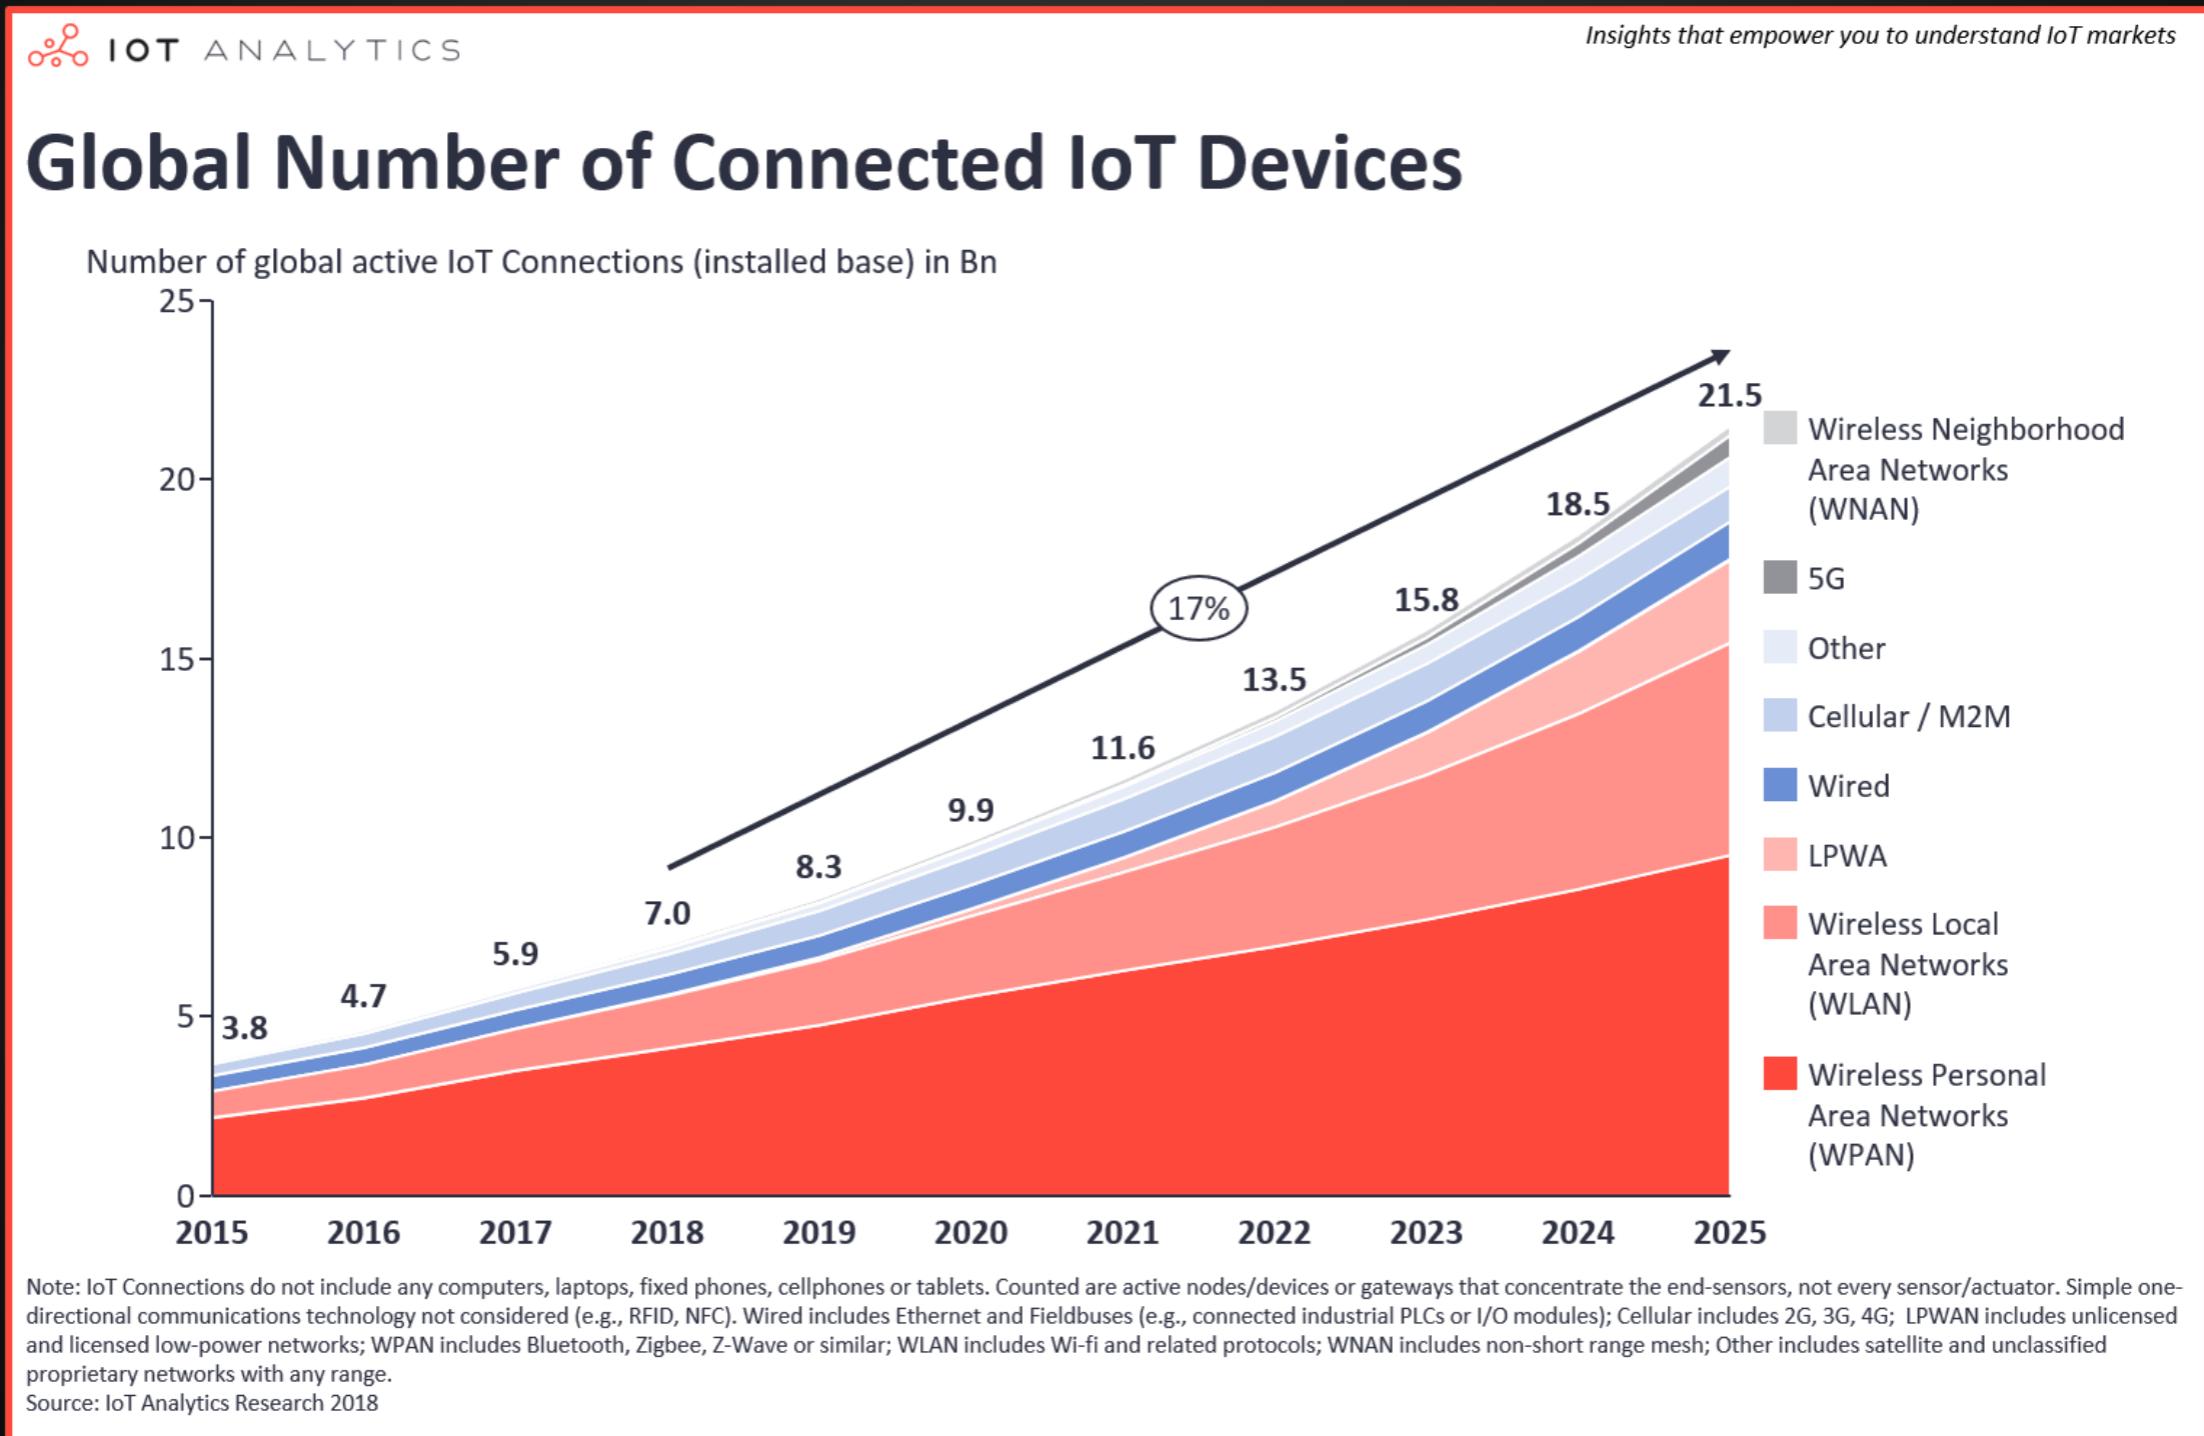

Internet of Things

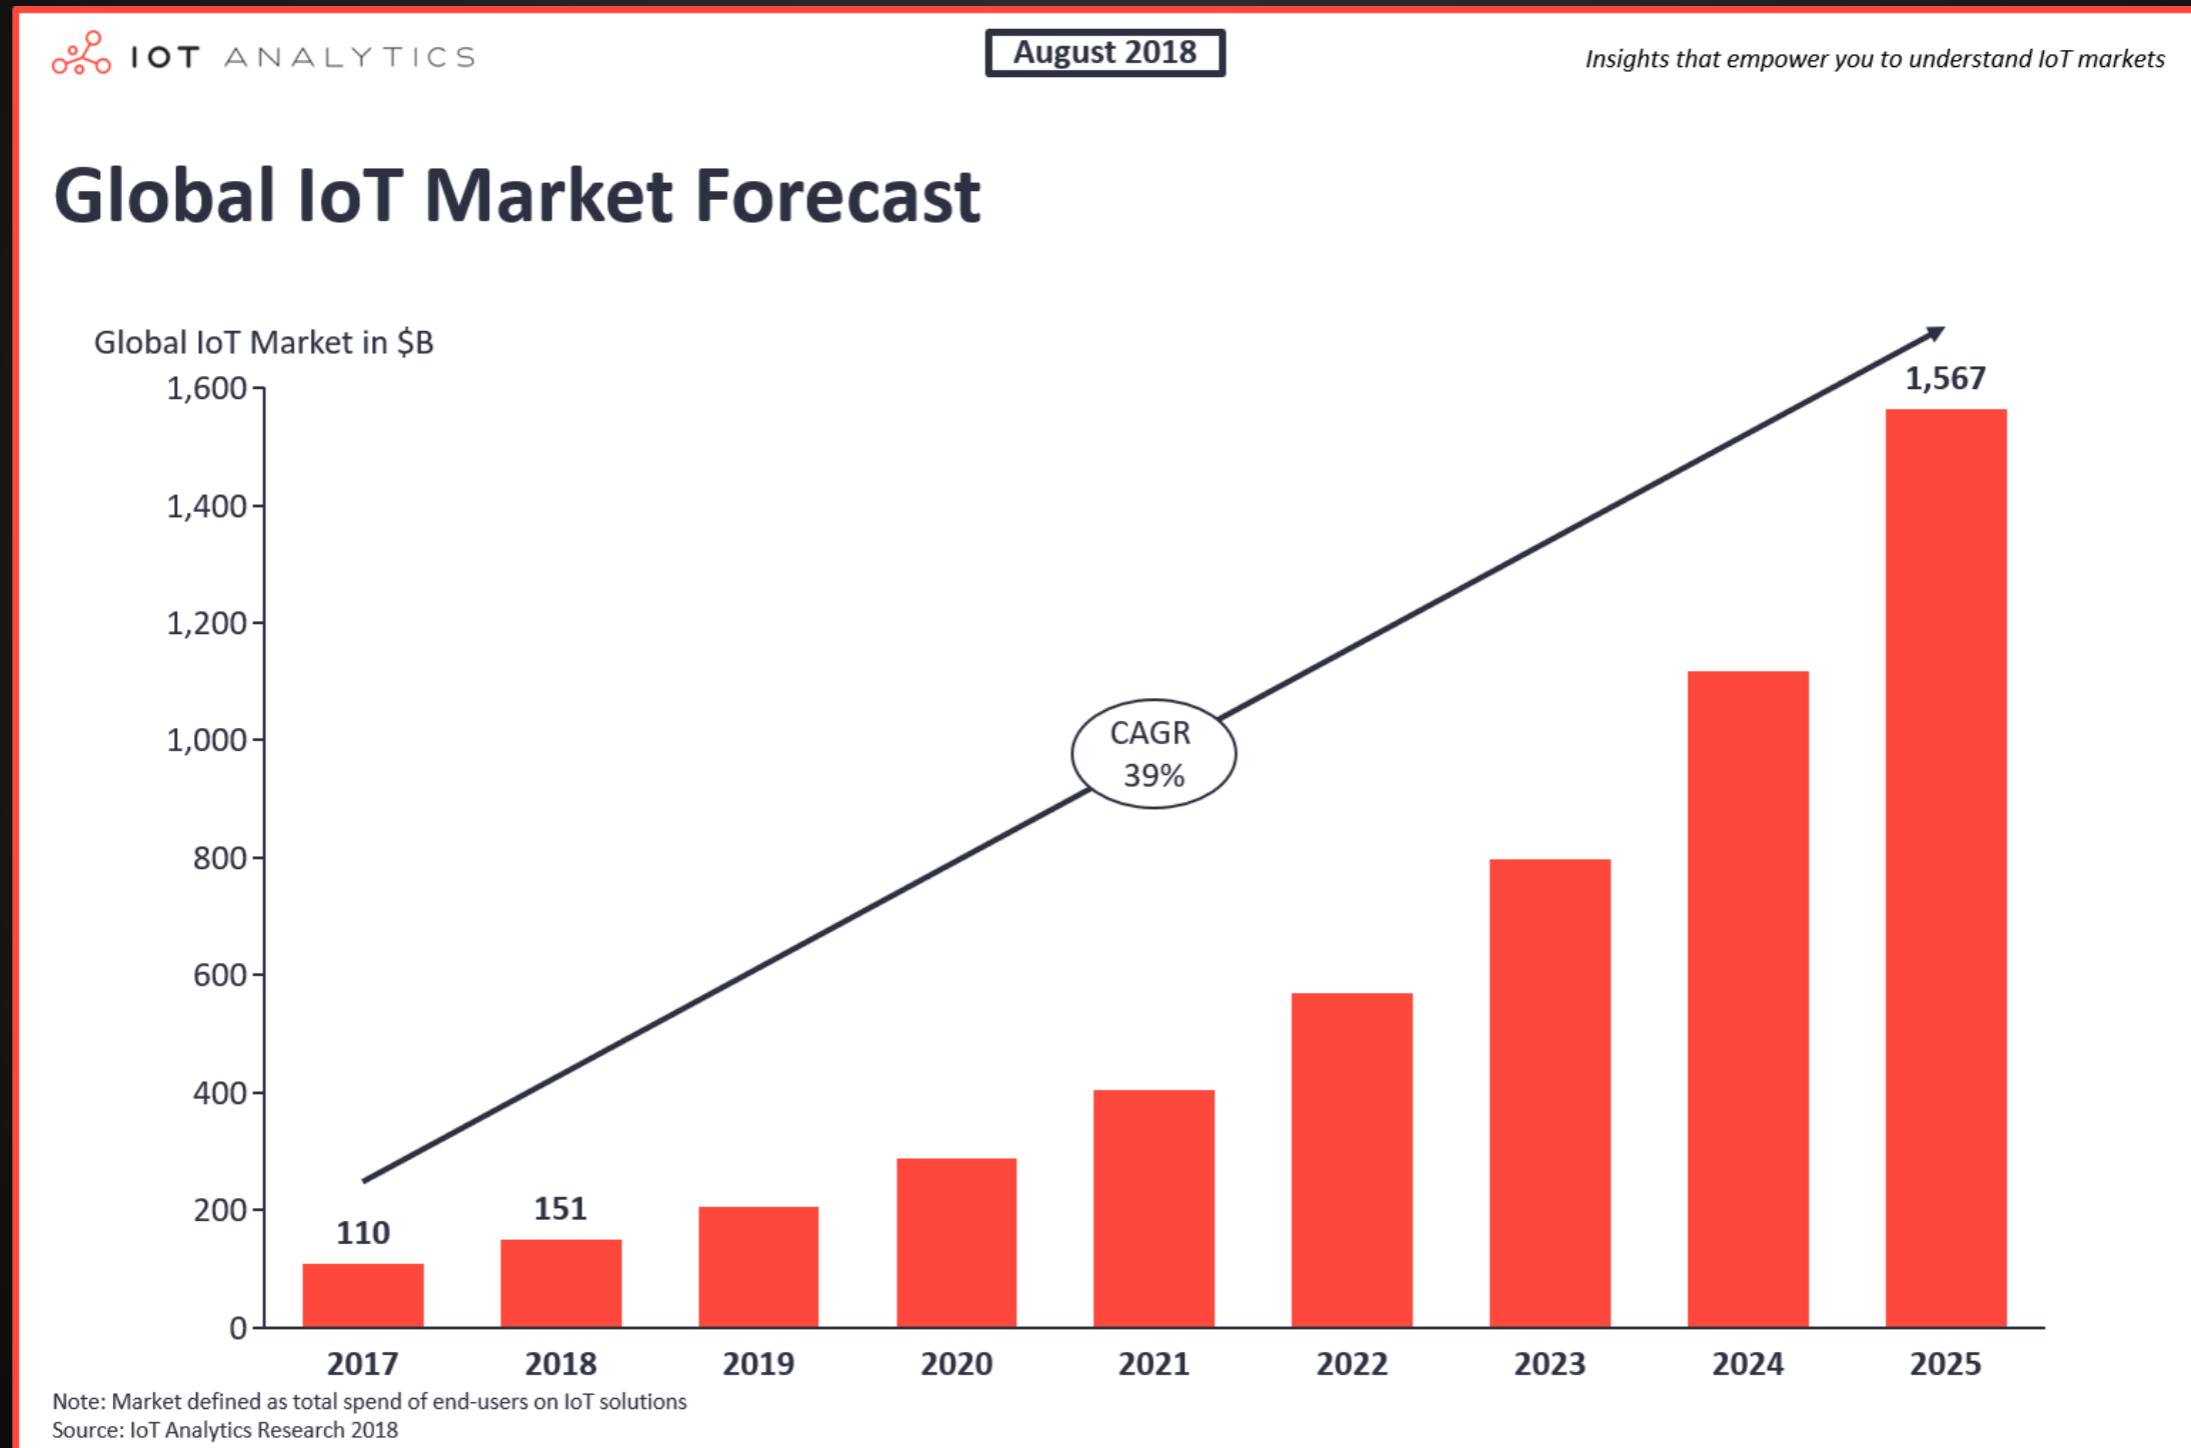

Internet of Things

- Smart Home/Building/City/everything
- V2X (vehicle to everything)
 - V2V (vehicle to vehicle)
 - V2I (vehicle to infrastructure)
- IIoT (Industrial IoT)
- IoMT (Internet of Medical Things) / Smart Healthcare
- IoMT (Internet of Military Things)

Smart Home Example




Internet of Things


- Wi-Fi
- Zigbee - 6LoWPAN
- LoRaWAN
- SigFOX
- Z-Wave

Types of Networks

Area Taxonomy

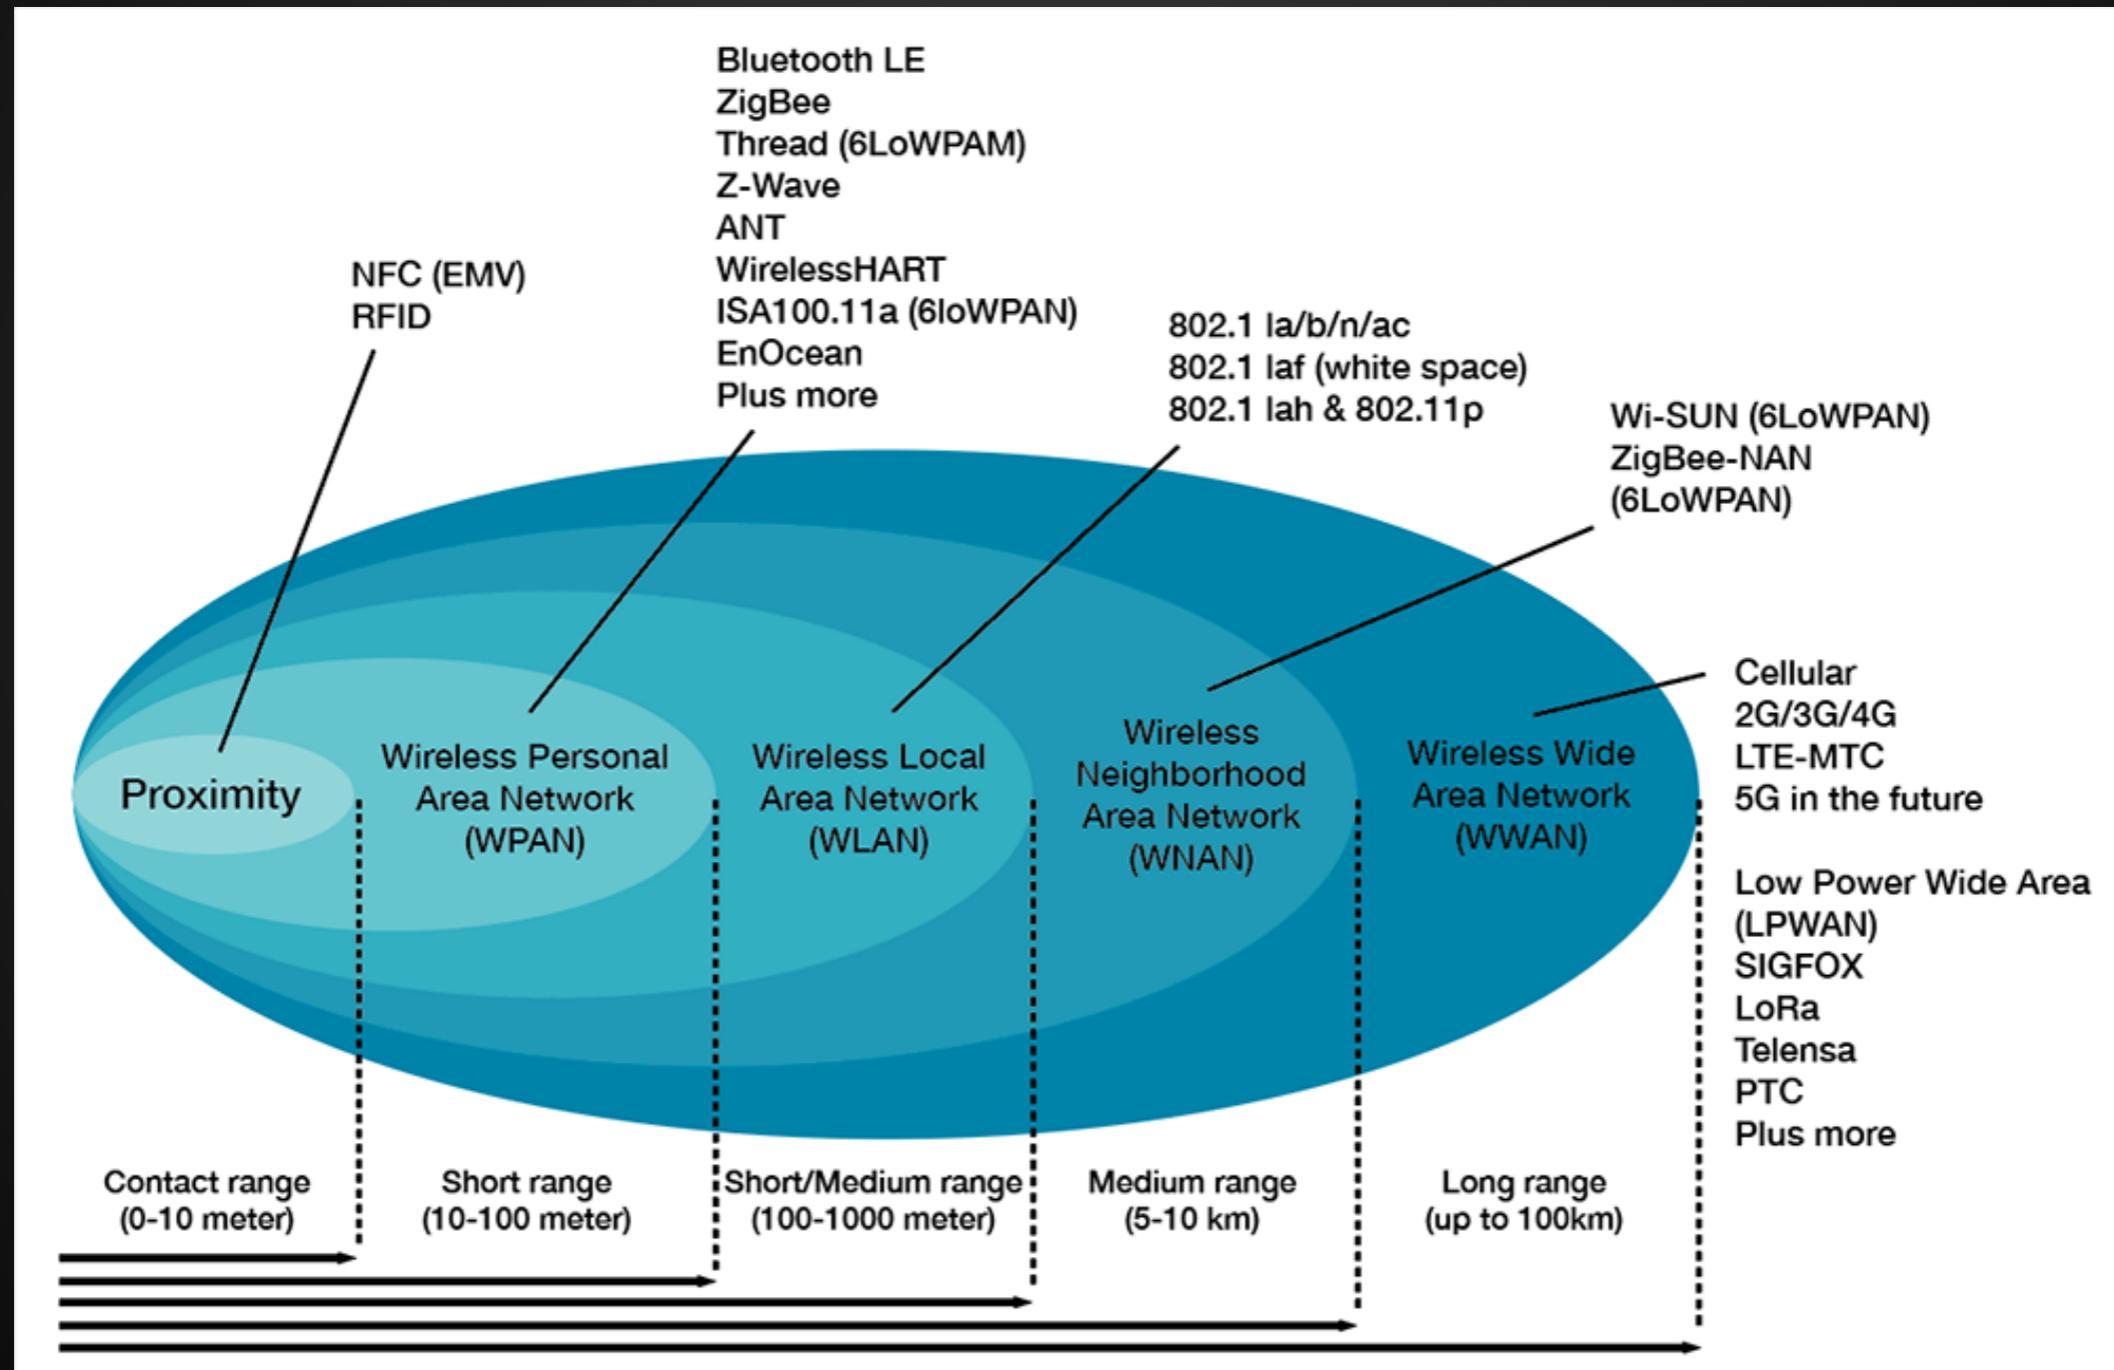

Comparison

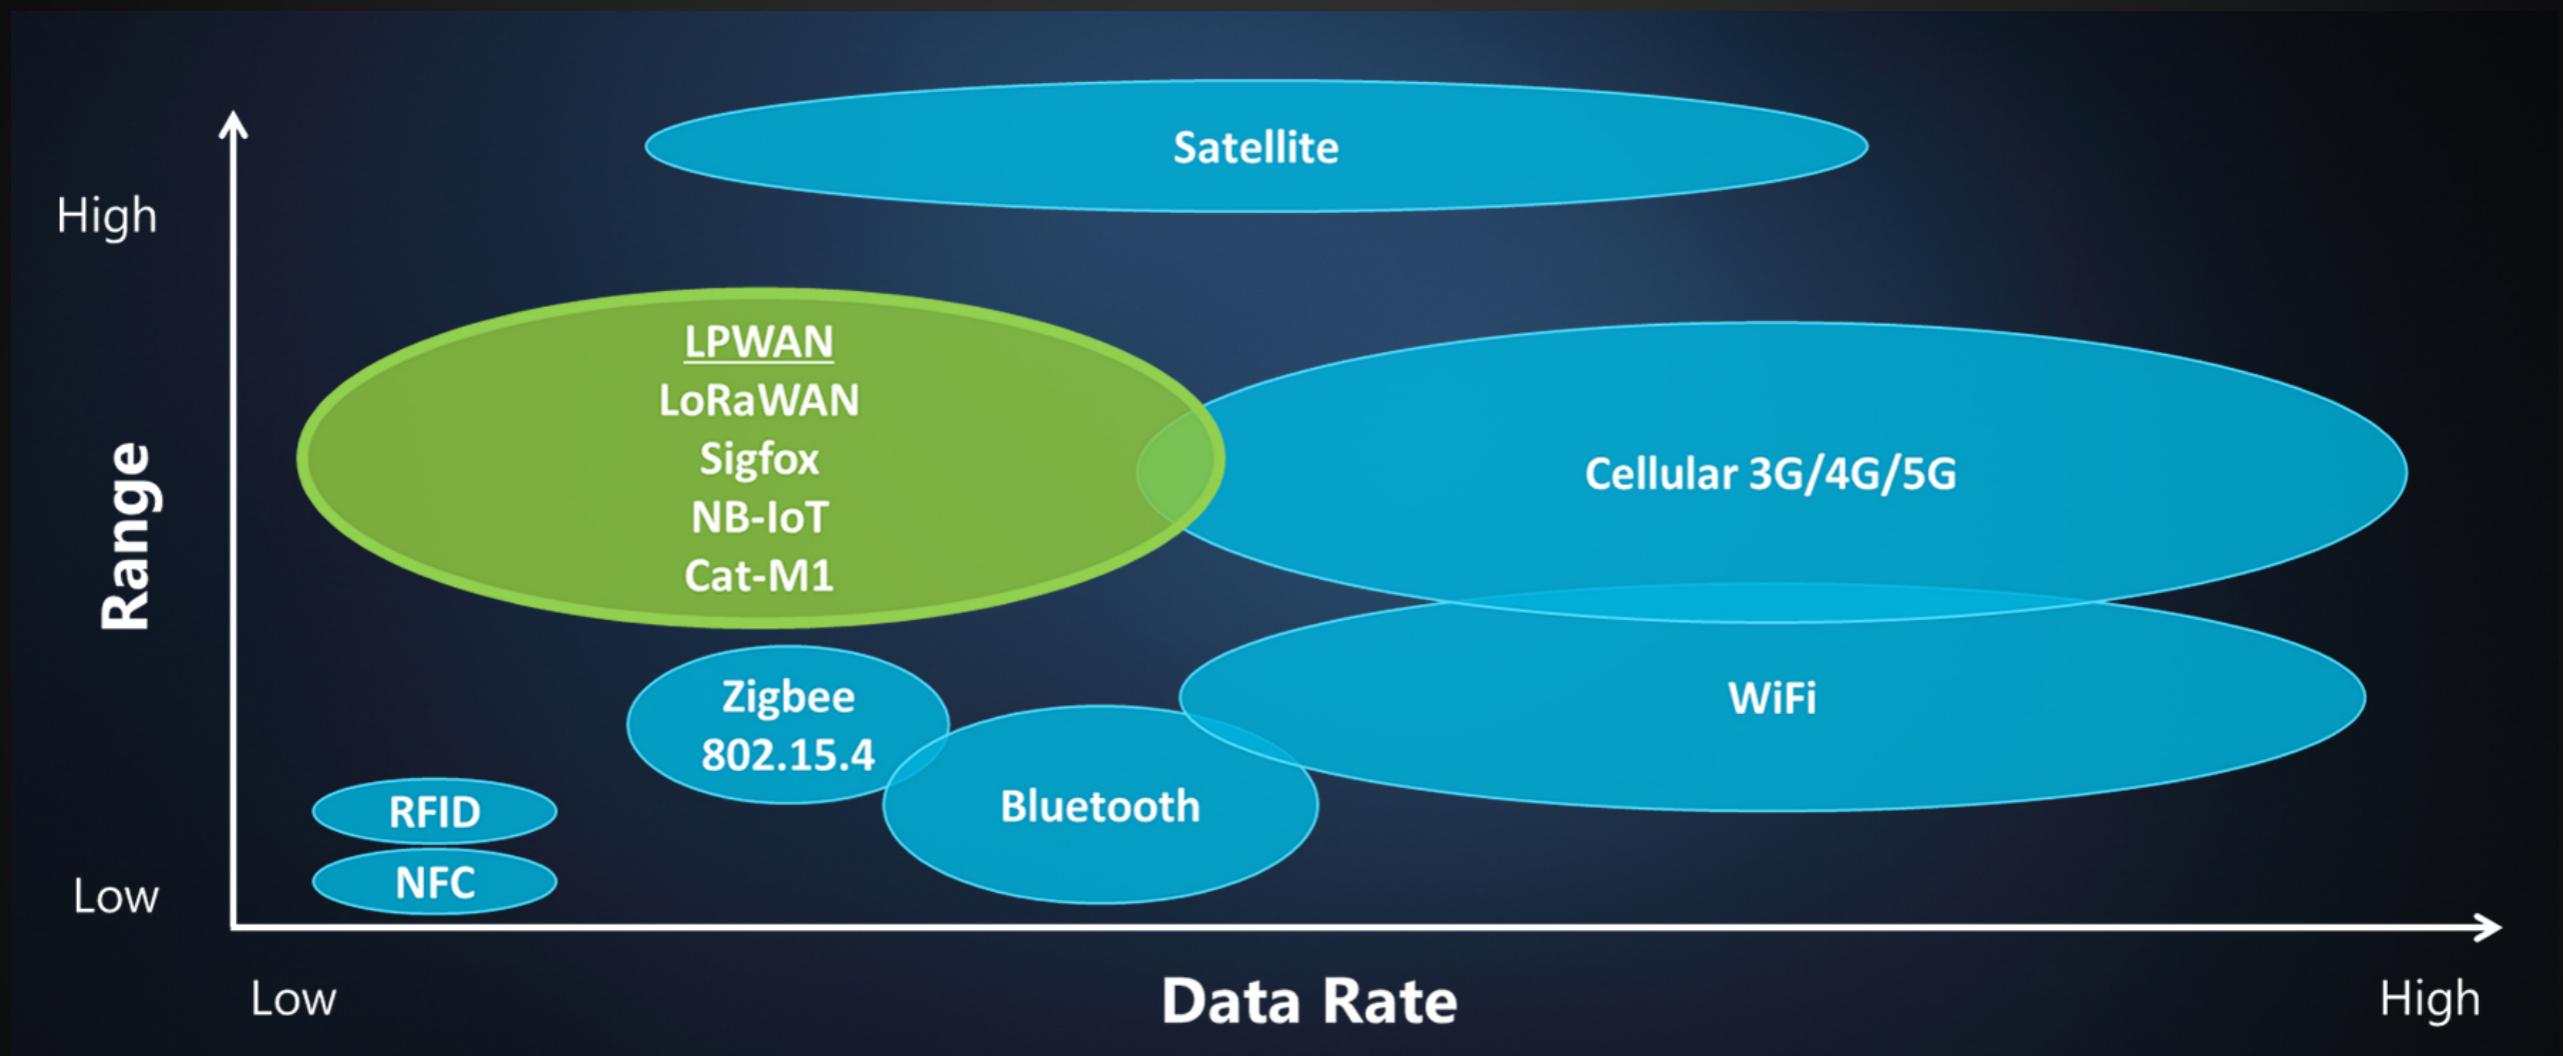

Comparison

	2017	2018	2019	2020	2021
Sigfox	8424	14538	27951	52281	85042
LoRa	32316	57298	98162	161561	247724
IEEE 802.15.4	290000	320000	450000	600000	750000
LTE Cat-M1	1978	8571	20284	28801	52288
NB - IoT	16166	34062	84885	161628	222902
Other	4022	6201	8714	7069	8402


Table 1.1: Global Annual Unit Shipment of LPWAN Modules in thousands

Comparison


	LoRa	Sigfox	NWave	On-Ramp	Telensa	IEEE 802.15.4g
Range (km)	3-8 urban 15-20 suburban 15-45 flat	3-10 urban 30-50 suburban	10	4	Up to 8	Up to 1
Frequency Band	Sub-GHz	Sub-GHz	Sub-GHz	2.4 GHz	Sub-GHz	Sub-GHz
Modulation	Spread Spectrum	Ultra NarrowBand	Ultra NarrowBand	Spread Spectrum	Ultra NarrowBand	FSK
Data rate (Kbps)	0.3-22	0.1-0.6	0.1	19 per MHz	up to 0.5	50-200
OTA upgrades	Yes	No	Yes	Yes	Yes	Yes

Table 2.1: Popular LPWAN protocols and their characteristics


LoRaWAN

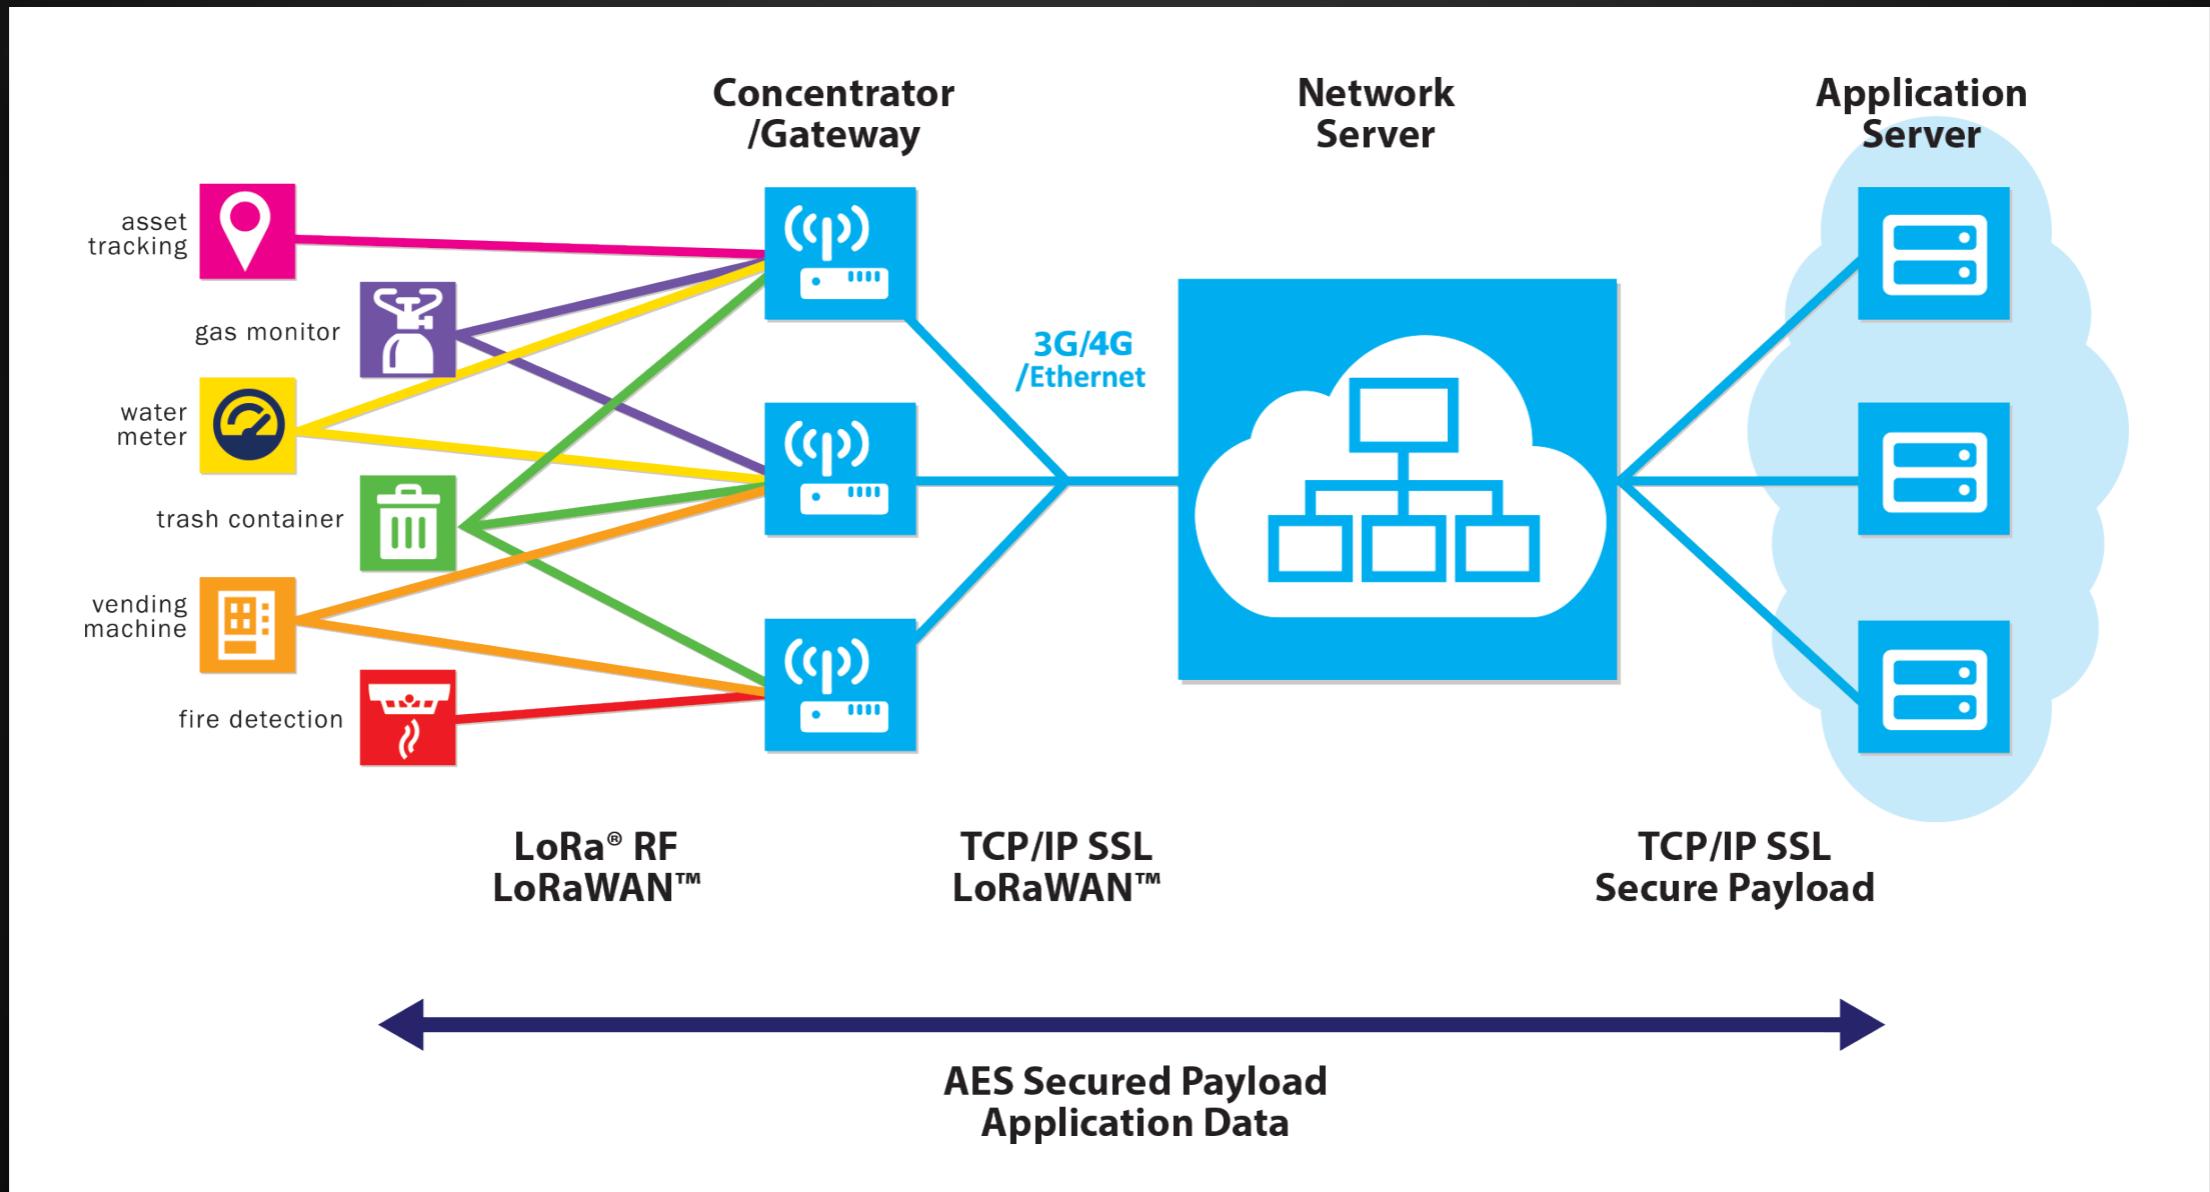



LoRaWAN

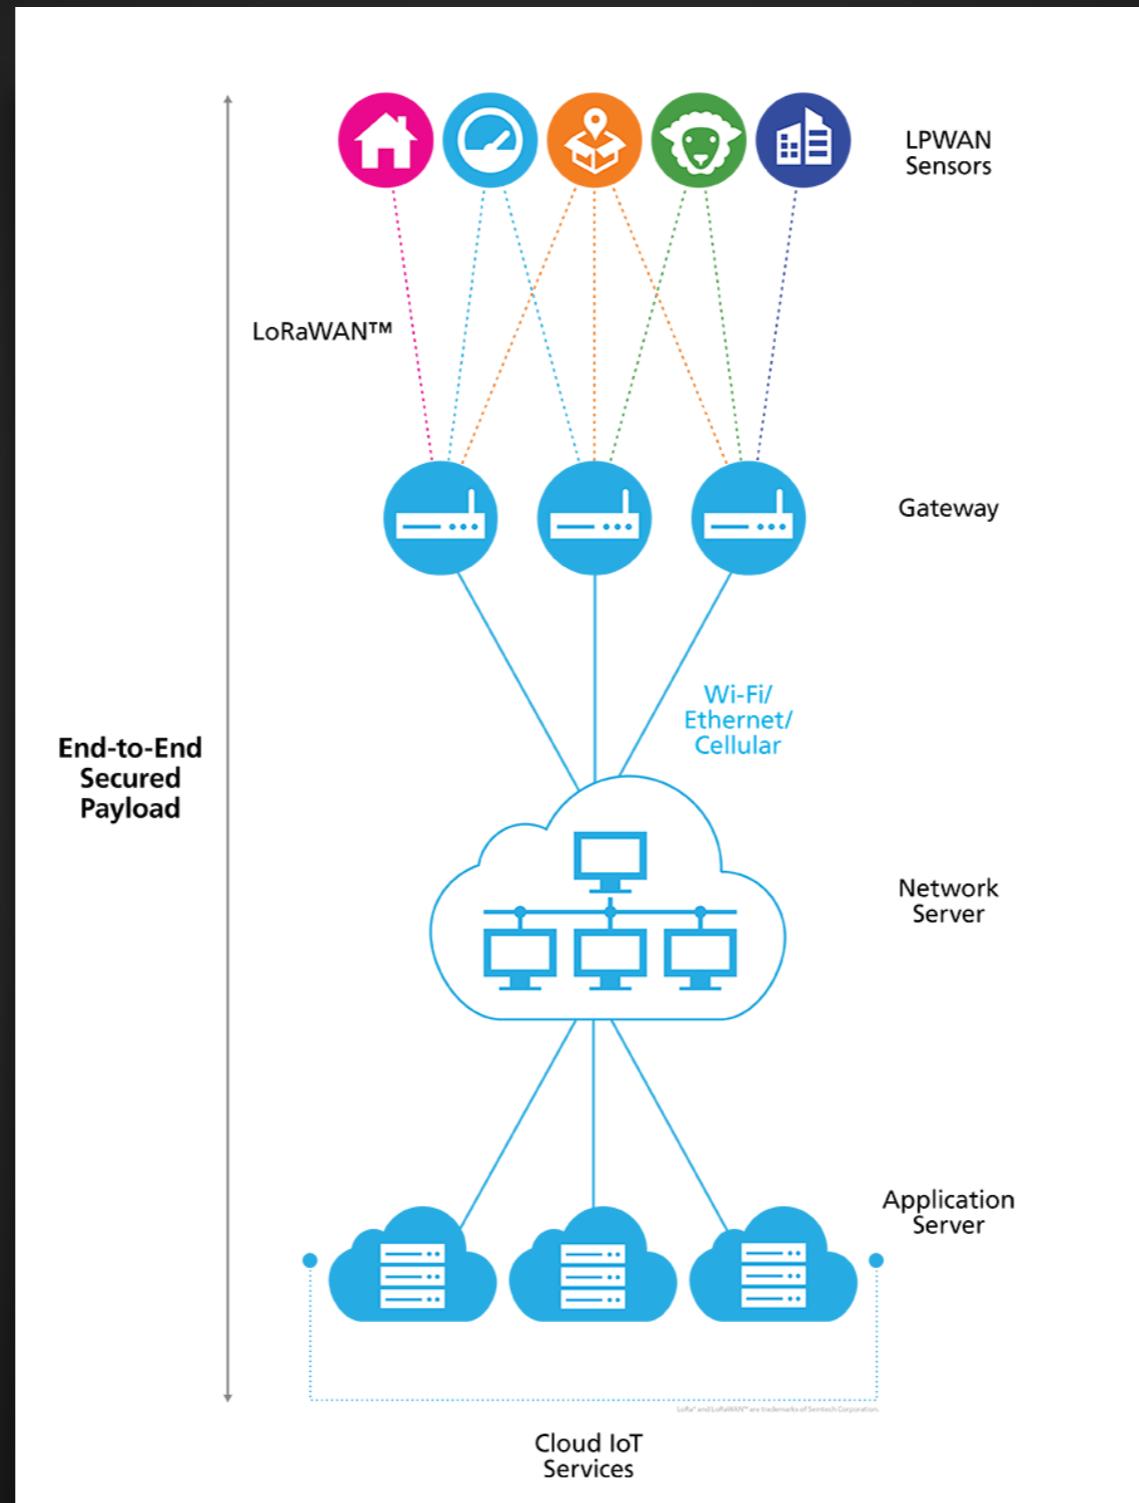



LoRaWAN

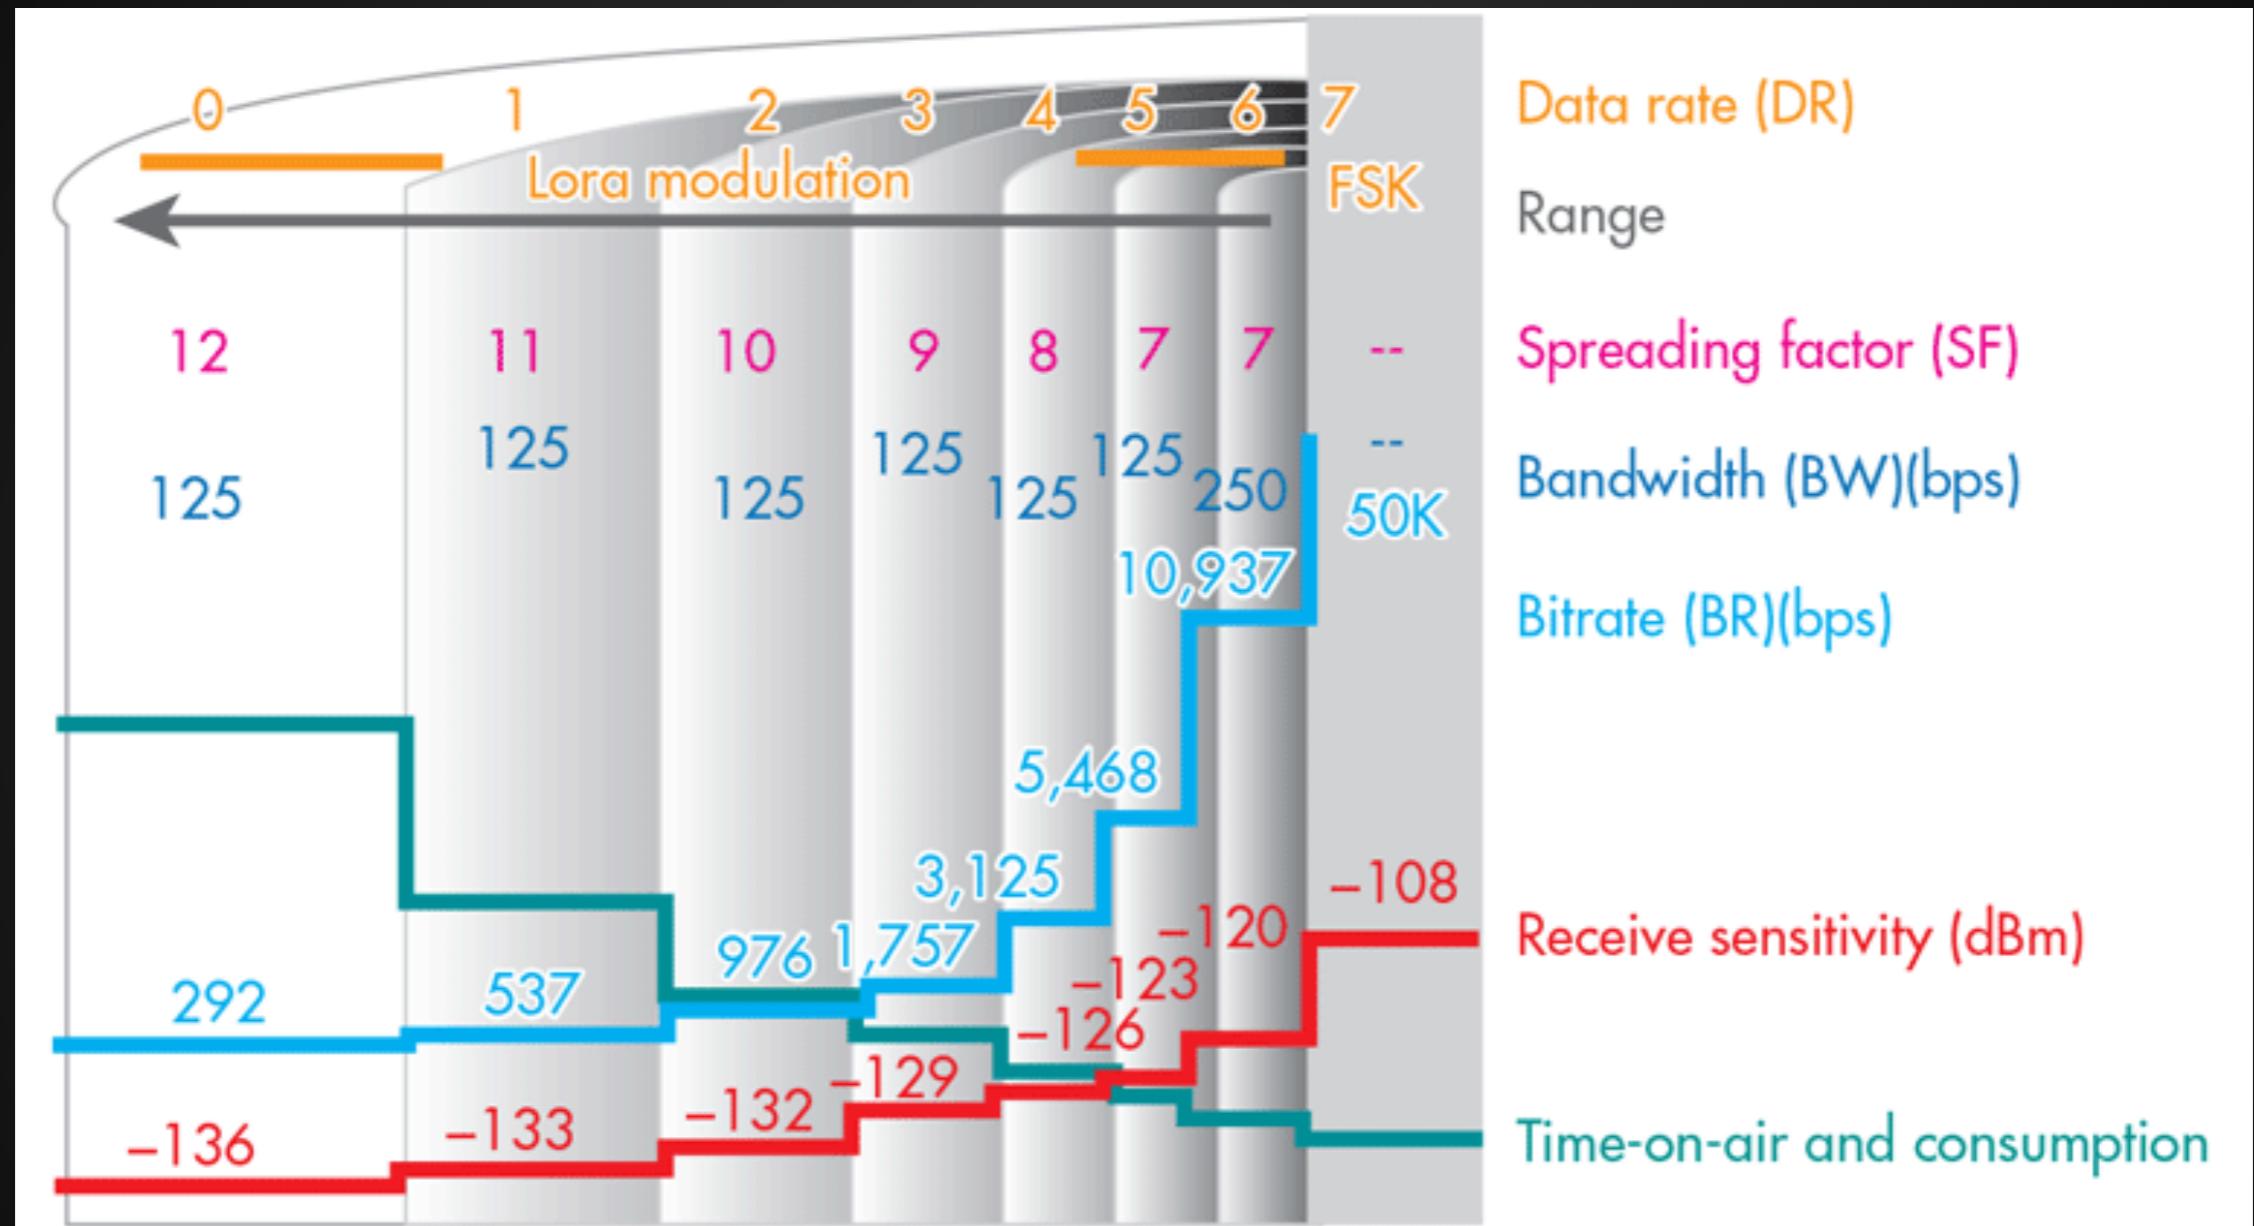

LoRaWAN

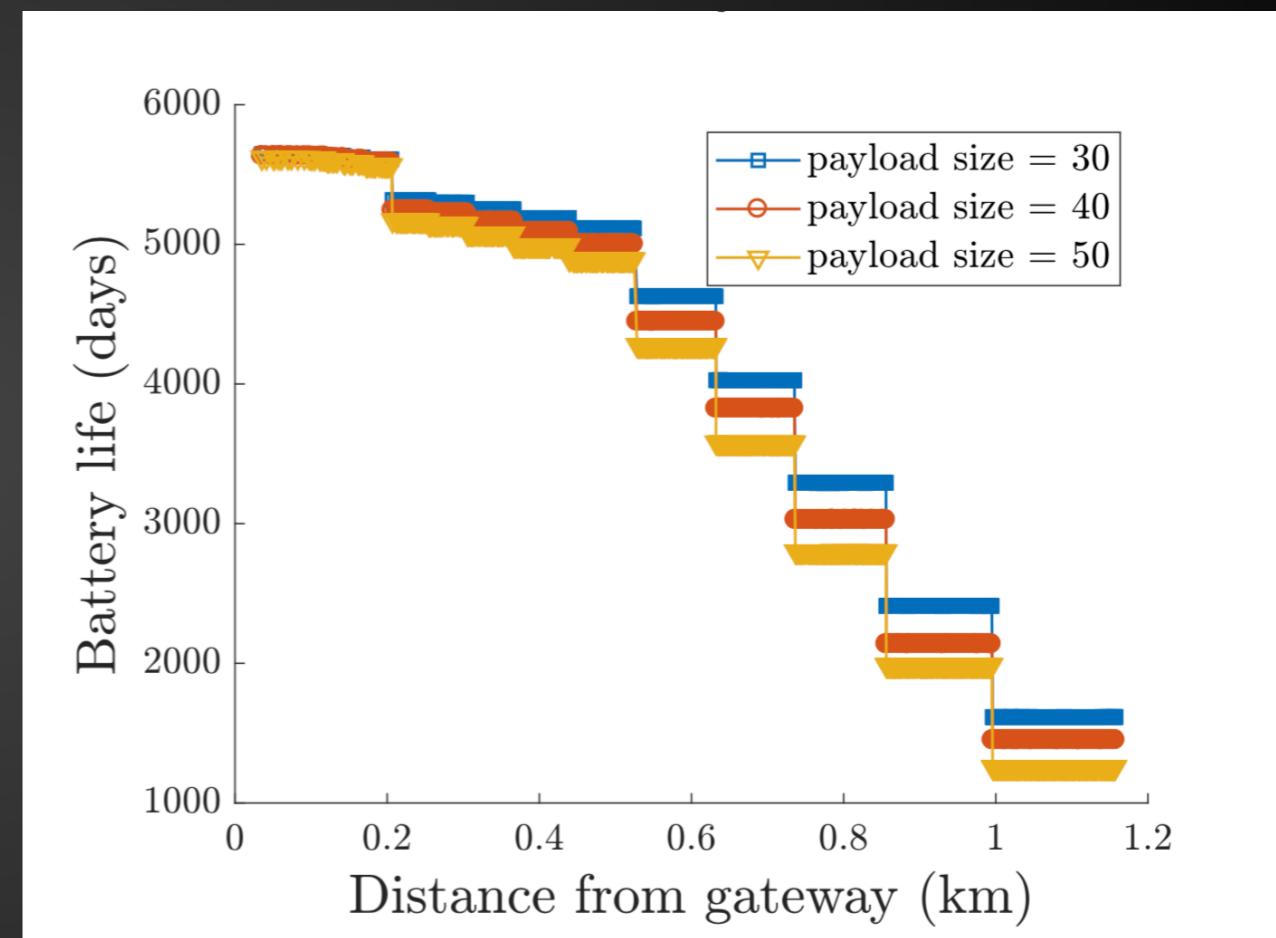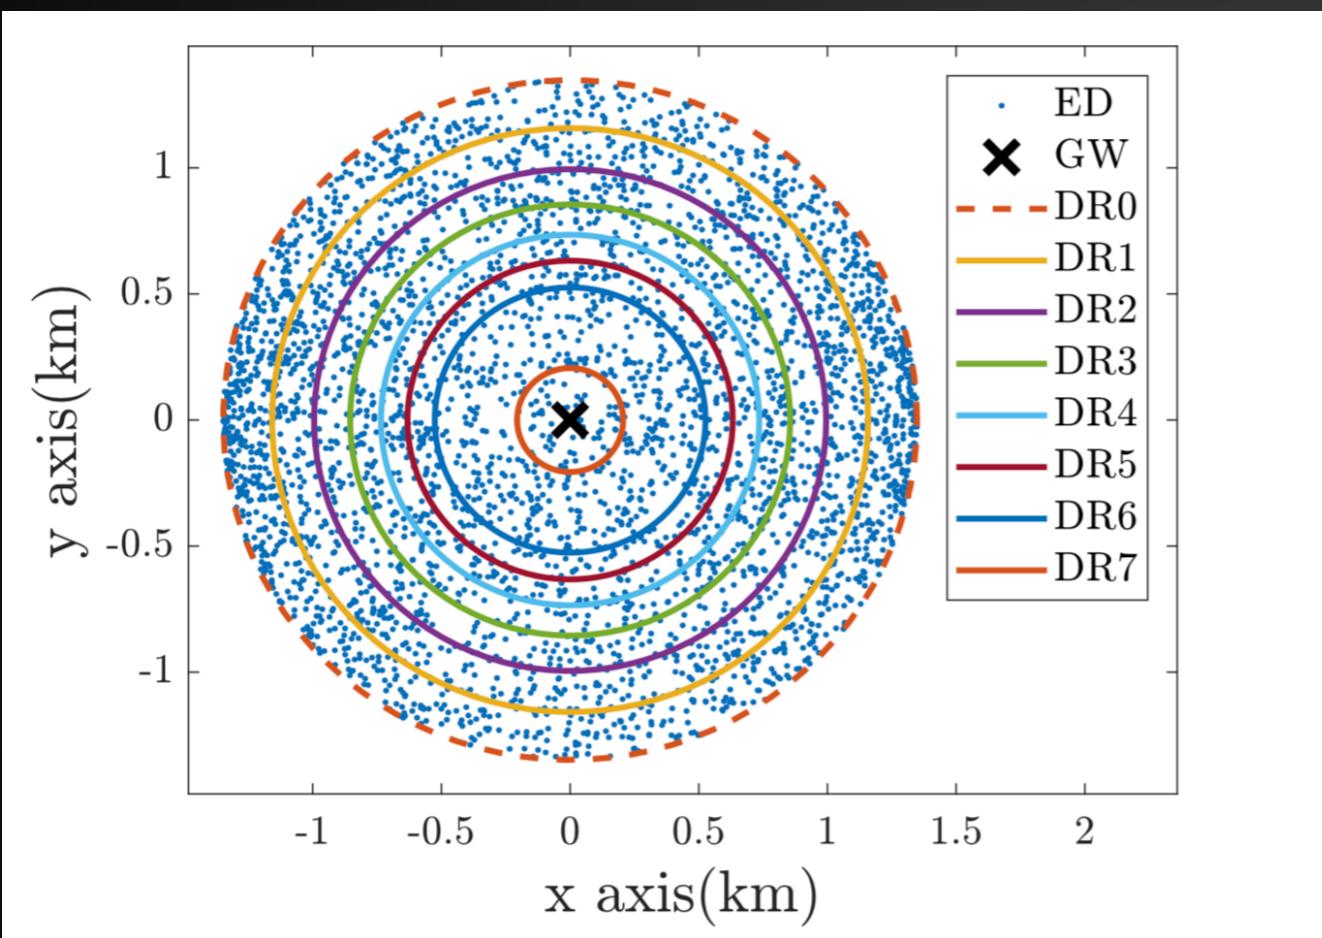

LoRaWAN

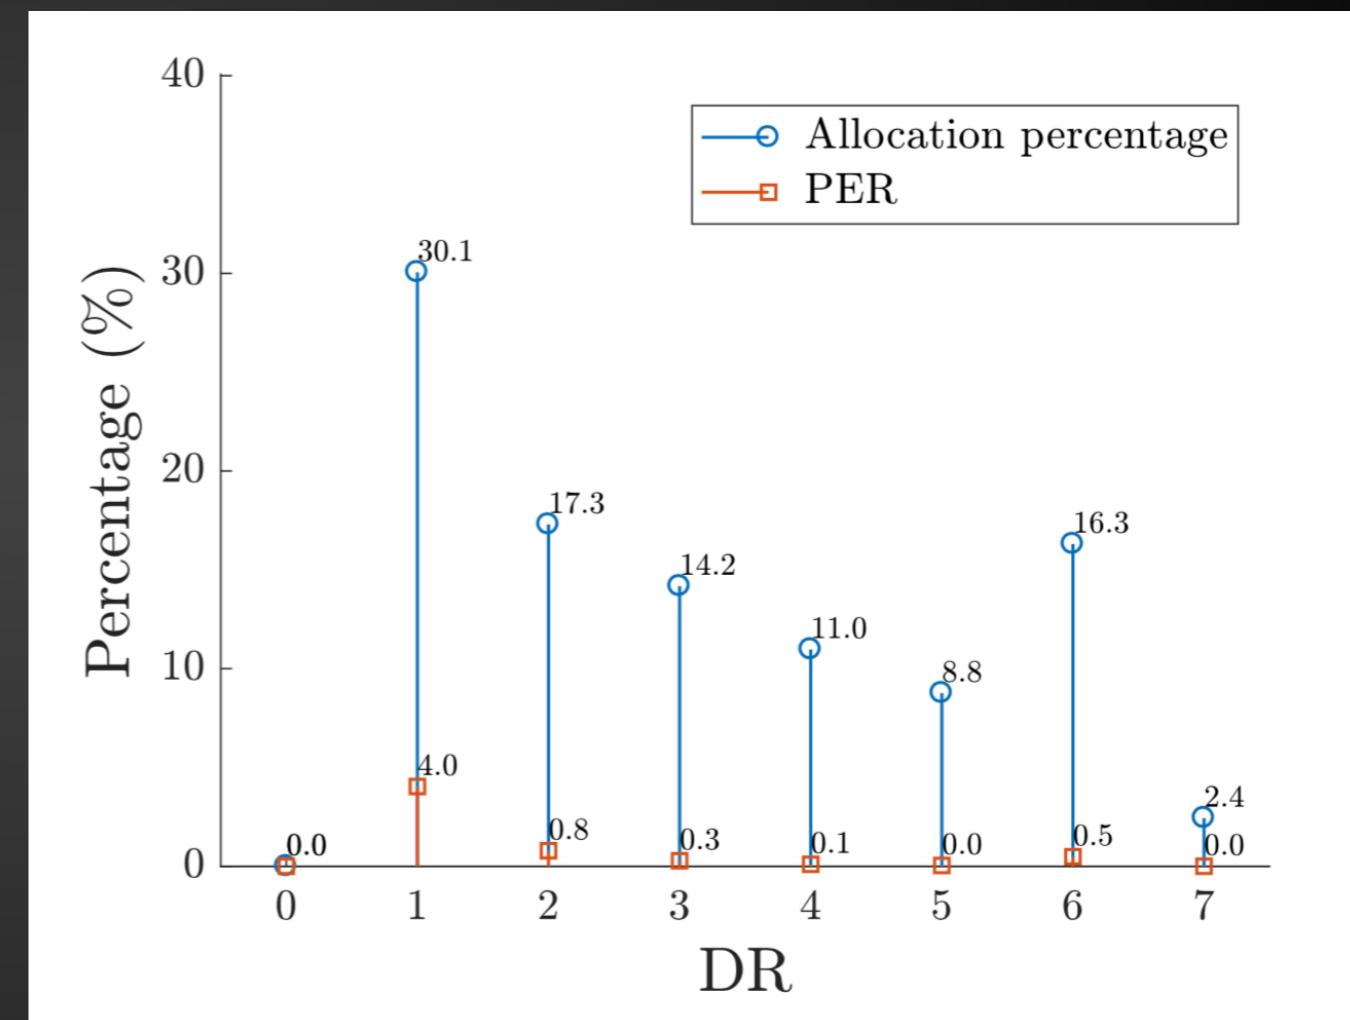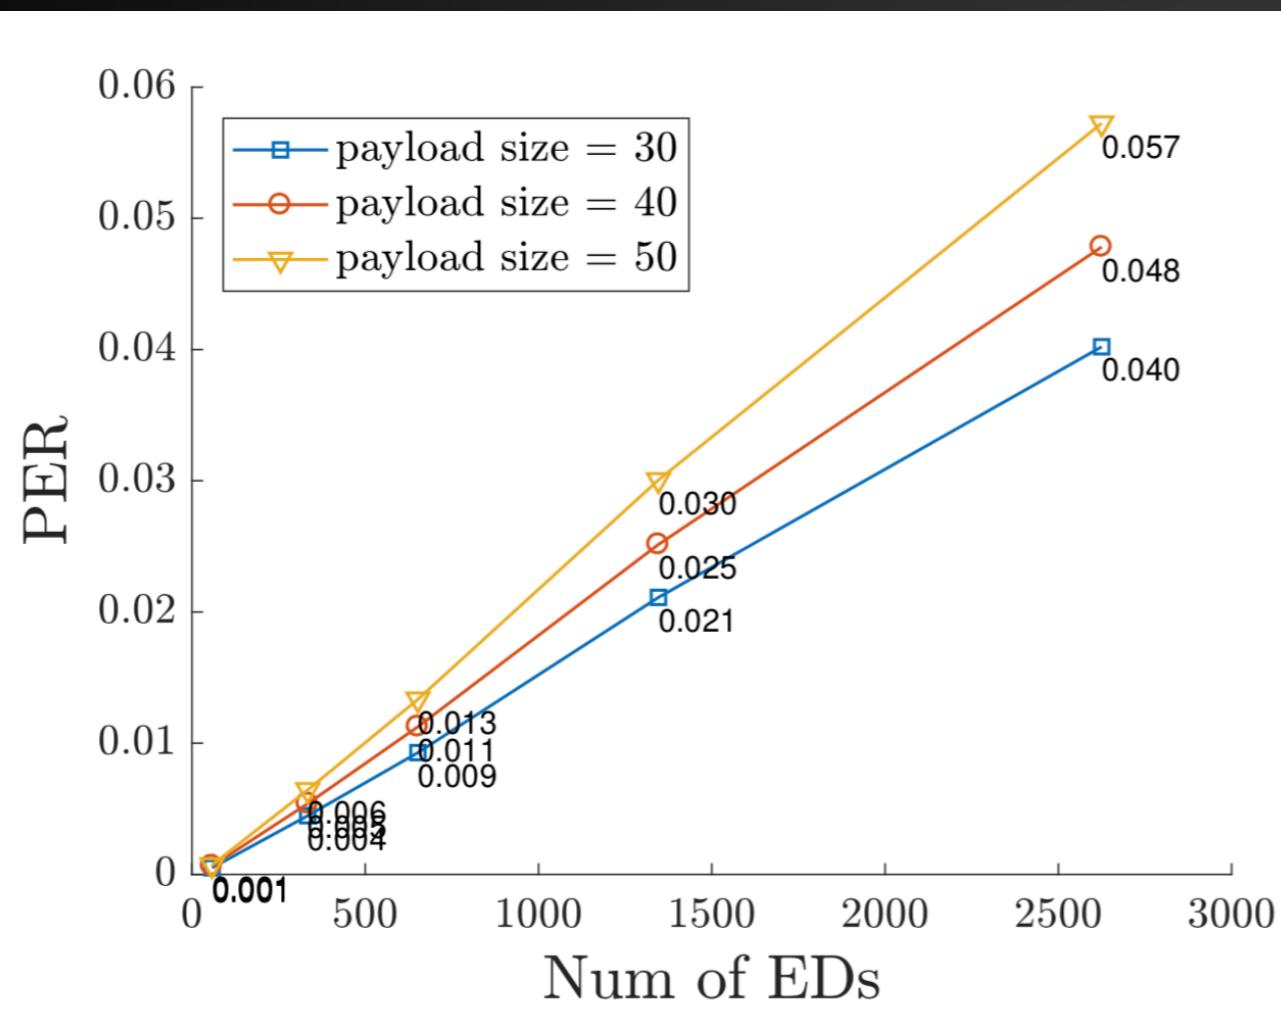


LoRaWAN


Spreading Factor	SNR (dB)
7	-7.5
8	-10
9	-12.5
10	-15
11	-17.5
12	-20

Table 3.2: SNR values for success demodulation of different SF

6LoWPAN stack

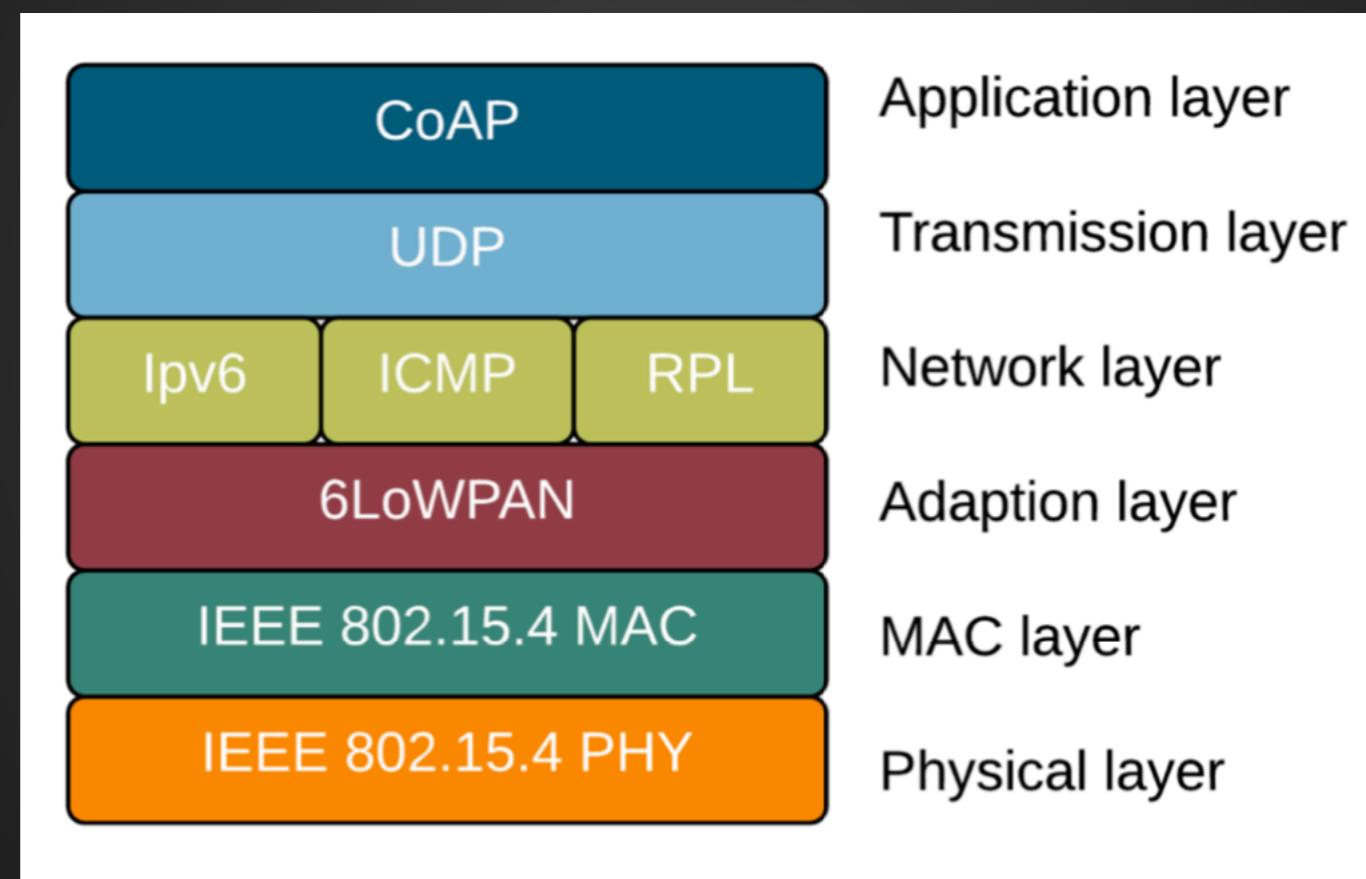


802.15.4

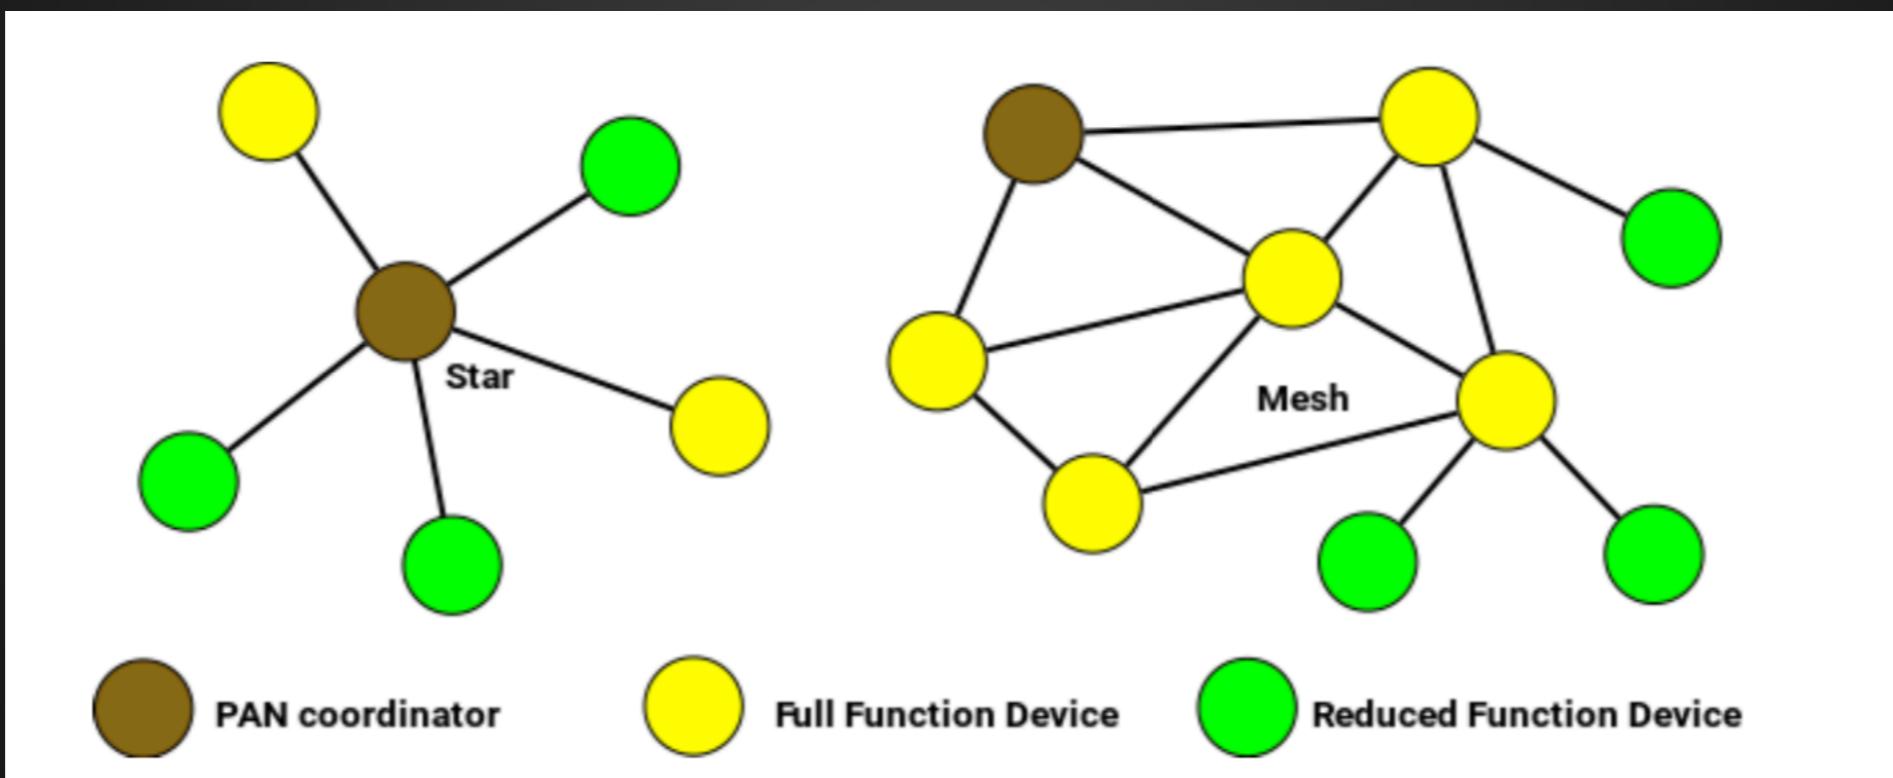


Physical Layer

LoRa

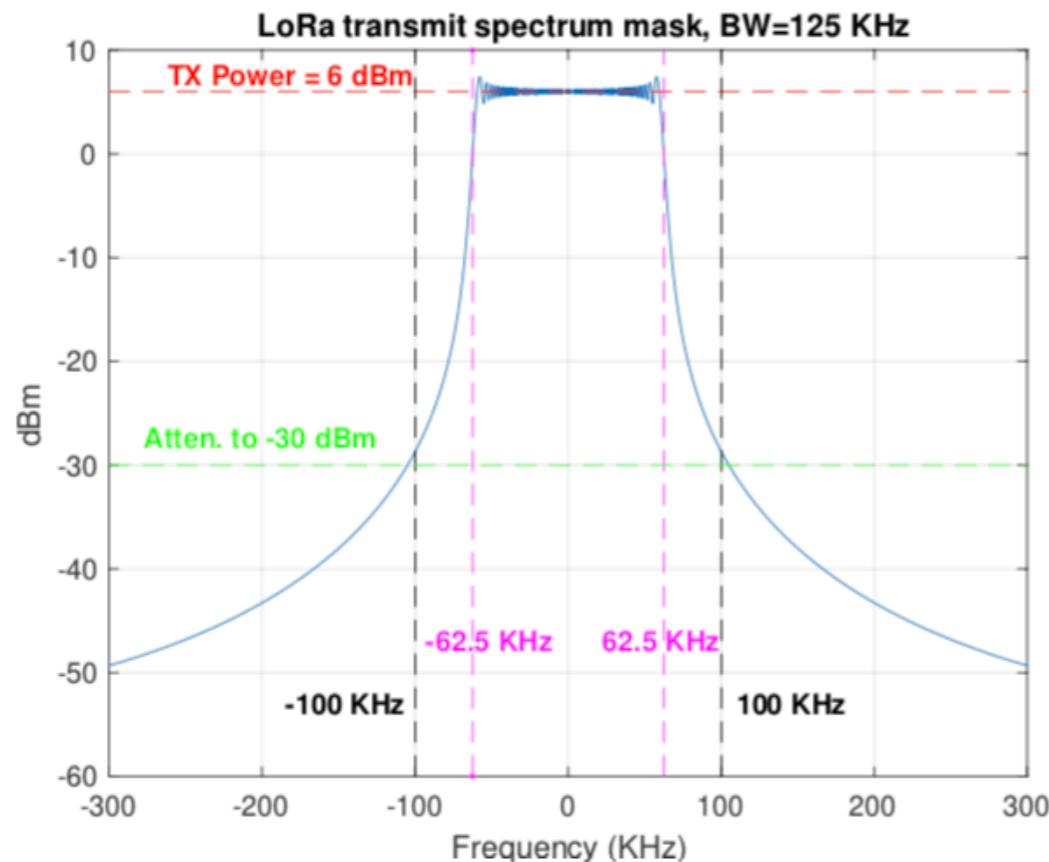


(a) Spectrum mask for $BW = 125 \text{ KHz}$

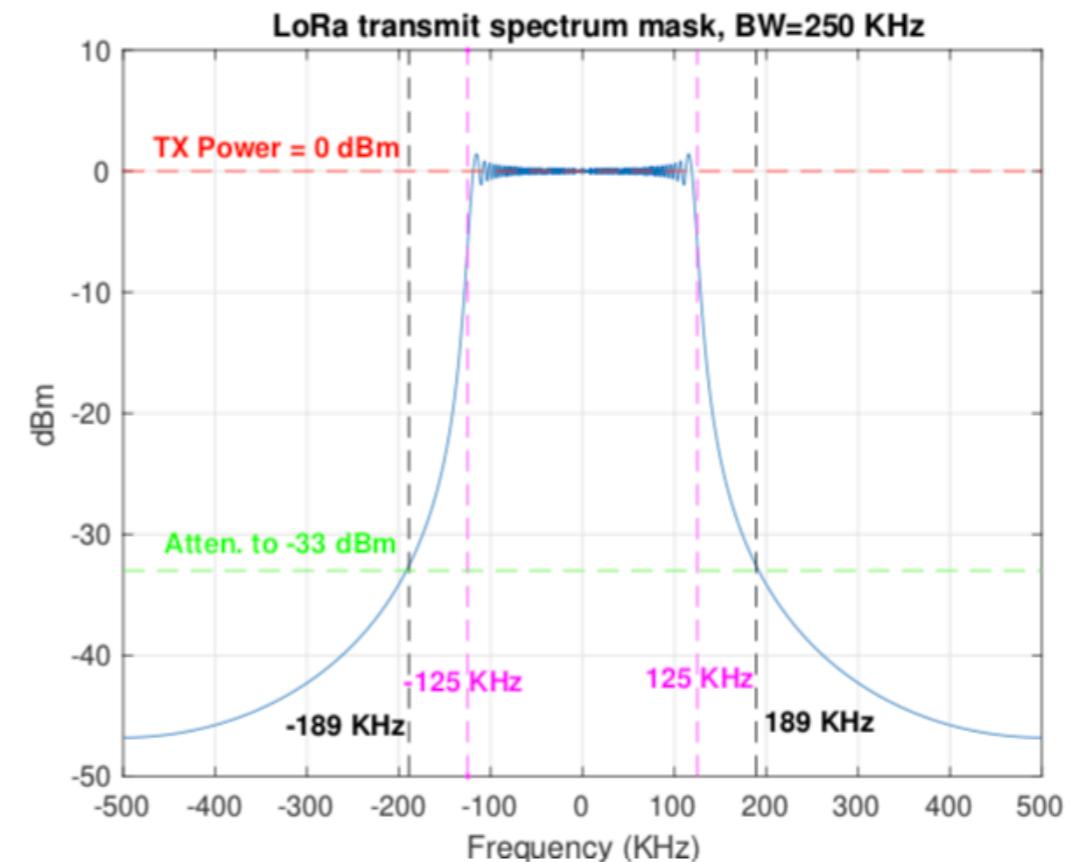

(b) Spectrum mask for $BW = 250 \text{ KHz}$



Physical Layer

802.15.4g

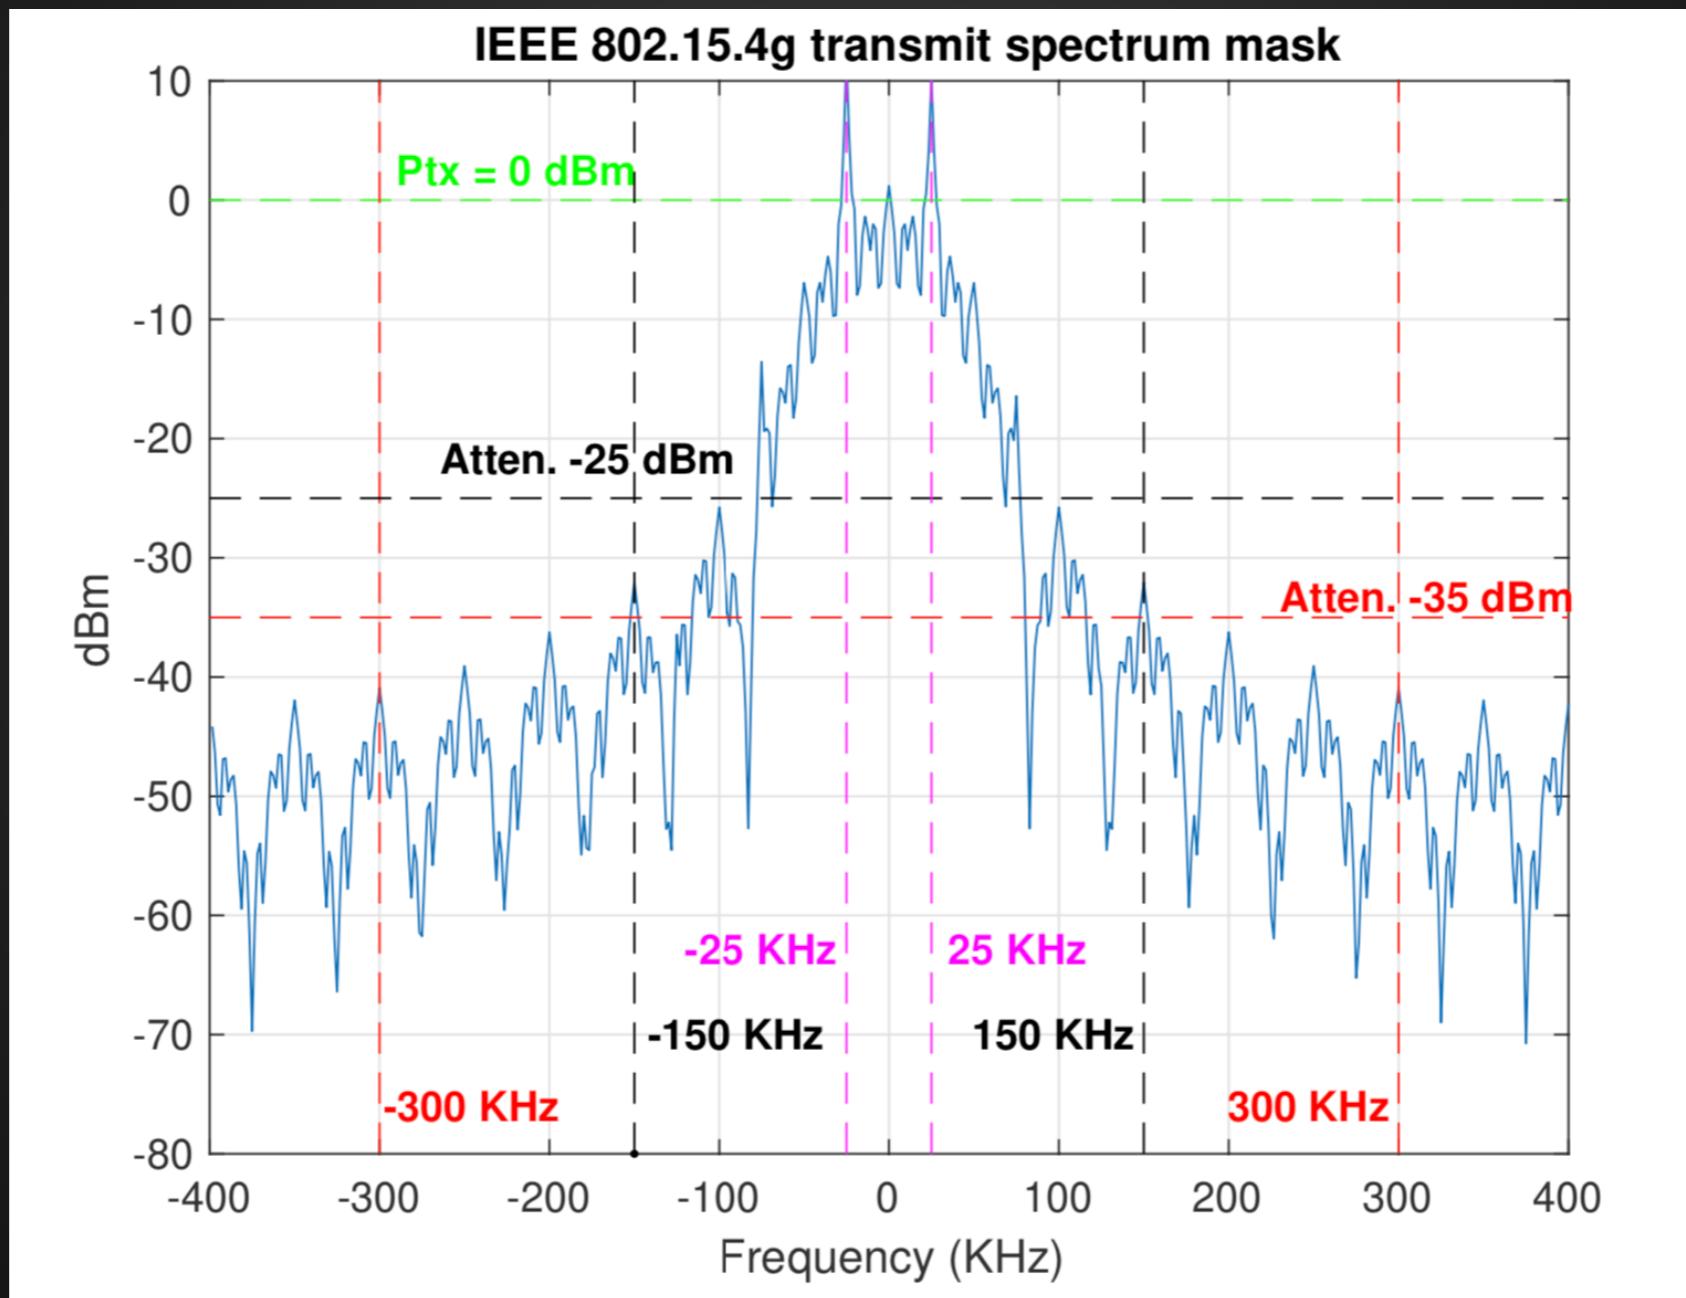

Spectrum Overlap

LoRa - 802.15.4g

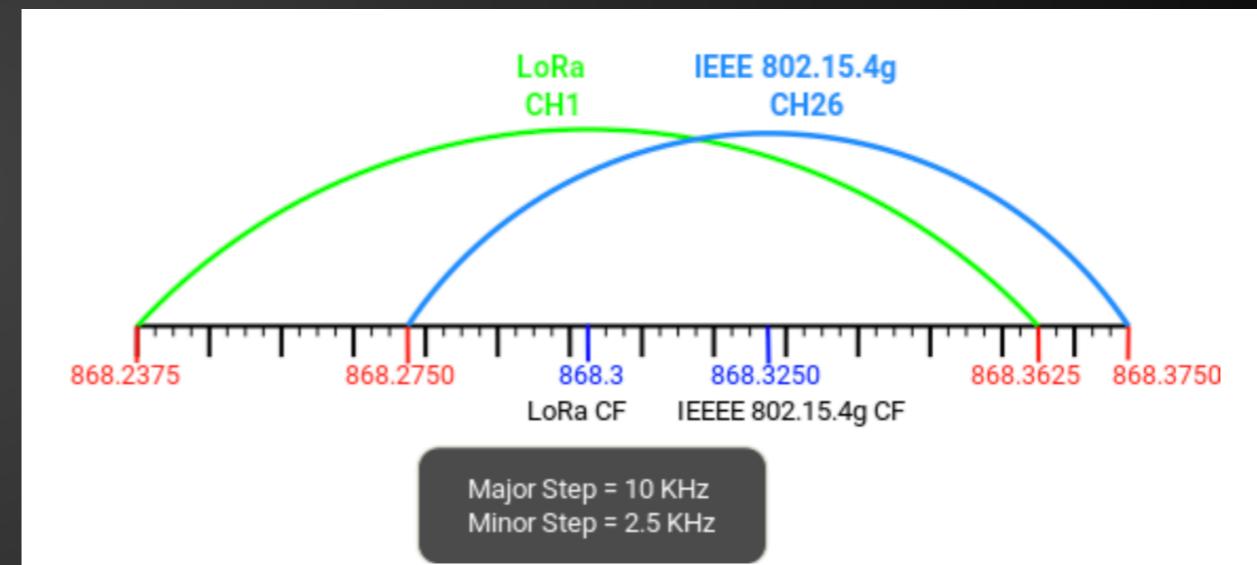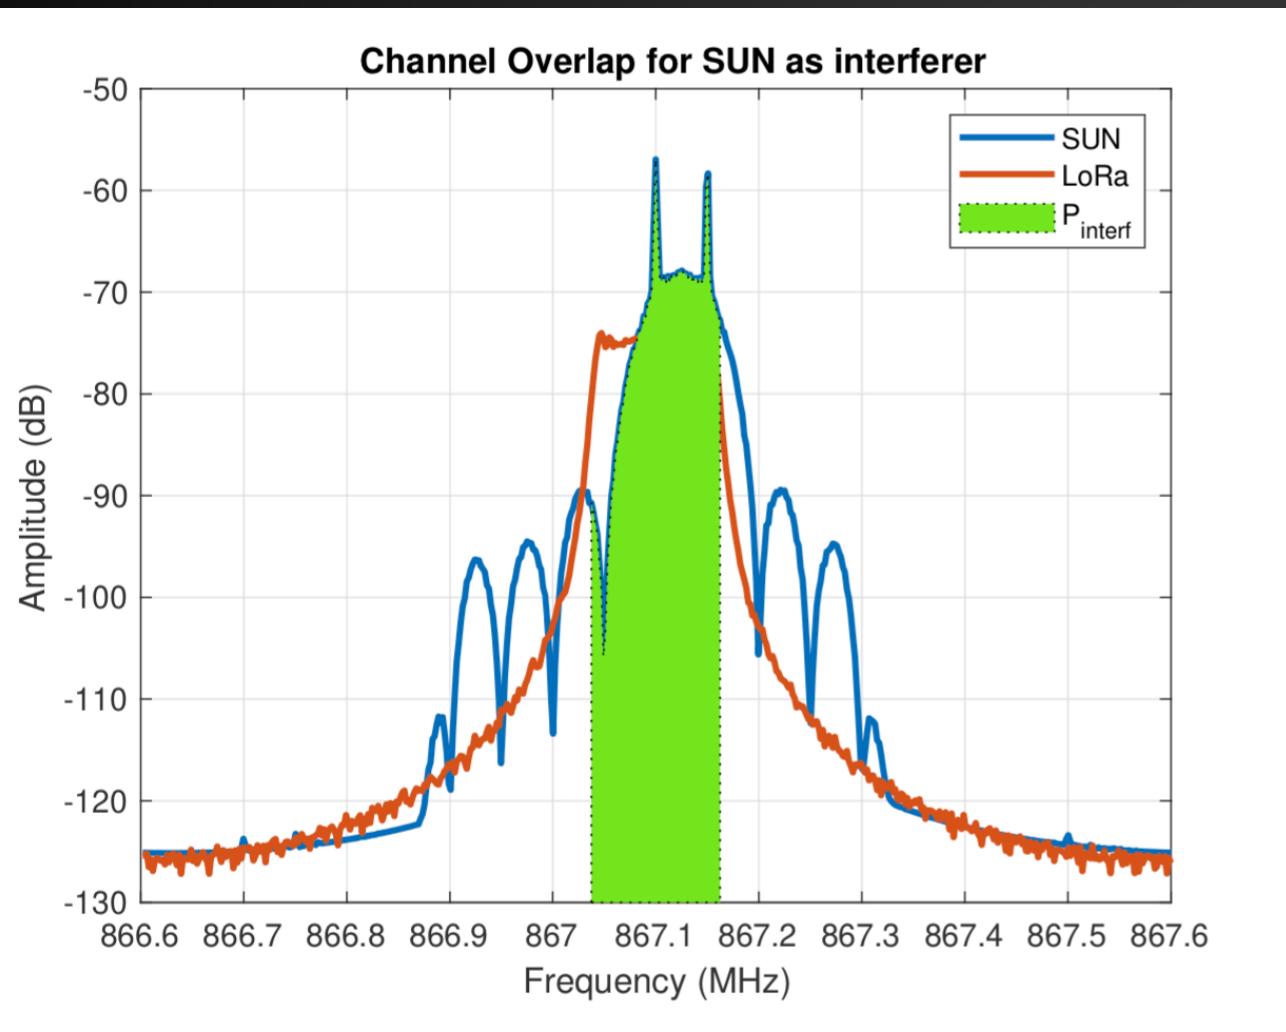

Channels Overlap

LoRa - 802.15.4g

